

myQ roger



MyQ Roger HP Workpath Application Installation and Usage



November/2024
Revision 2

Table of Contents

1	Introduction	4
2	Release Notes	5
2.1	MyQ Roger terminal for HP 24.3.1	5
2.2	MyQ Roger terminal for HP 24.1.4 (185).....	5
2.3	MyQ Roger terminal for HP 24.1.3 (117).....	6
2.4	MyQ Roger terminal for HP 24.1.....	6
2.5	MyQ Roger terminal for HP 2023.08.22(77)	6
2.6	MyQ Roger terminal for HP 2022.08.23(62).....	6
2.7	MyQ Roger terminal for HP 2022.08.08(43).....	6
2.8	MyQ Roger terminal for HP 2022.03.23(37).....	7
3	Basic Information	8
3.1	Supported Devices.....	8
4	Pre-Installation Steps.....	9
4.1	Installation on HP MFDs	11
4.2	Device Configuration.....	16
4.2.1	SMTP and Scanning Options	16
4.2.2	Enabling Virtual Keyboard	17
4.2.3	Locking the Device.....	18
4.2.3.1	Login with the possibility of login with device administrator	19
4.2.3.2	Login with the possibility of login without device administrator	20
4.2.4	Language Settings	21
4.2.4.1	Language of the Login Screen.....	21
4.2.4.2	Language of the Application	21
5	MyQ Roger Mobile App Setup.....	23
6	Registration of MyQ Roger to the Tenant.....	29
6.1	Information about Terminal Version and Connected Tenant.....	30
7	Using MyQ Roger	32
7.1	Usage of the Terminal.....	32
7.1.1	Log in	32
7.1.2	MyQ Roger Available Actions	33
7.1.3	User Workflows	42
7.1.4	Supported Paper Formats.....	45
8	Obtain Logs	47
8.1	MyQ Roger HP Terminal Logs.....	47

8.1.1	Logs from server web UI.....	48
8.1.2	MyQ Roger Client logs	48
9	Uninstallation.....	49
10	Availability Monitoring.....	52
10.1	Current Status.....	52
10.2	Past Incidents.....	54
10.3	Subscribe to Updates	55
11	Business Contacts	56

1 Introduction

MyQ Roger is a full-fledged **public cloud solution, designed to increase any person's productivity and efficiency.** No matter if they work in an office environment or from home.

Capture documents with your mobile phone, multifunctional printer or from your e-mail inbox. Store them locally or in your personal cloud. Trigger advanced workflows. Transform documents to editable formats or electronic data that can be processed automatically by your integrated applications. Set up your own quick actions, or just use suggestions created by the system.

Benefit from MyQ Roger's top Performance, High Availability and Multitenancy.

With MyQ Roger, you get a unique virtual experience of collaboration at work and document management – your brand-new **Smart Digital Workplace Assistant.** Enjoy the simplicity of its **fully personalized UI**, use OneDrive or another cloud storage to print and scan your documents **with a single click**, and keep your digital office in your pocket at home, on the move, or at the office.



2 Release Notes

 FutureSmart 5.7+ is required for this application.

2.1 MyQ Roger terminal for HP 24.3.1

12 November, 2024

Improvements

- SharePoint cloud storage browser is available.
- Debug log from the device is possible to download via Roger web UI.
- Upgraded Workpath SDK to 1.6.2.
- Upgraded Android min SDK target API to 31 or above.
- Remote configuration and mass deployment via HP Command Center.
- Improved UI and animations.
- Login sequence speed improved.
- OCR on supported devices.

Bug Fixes

- JPG printing unsupported.
- Email destination not valid with Scan to email, Scan to me.
- The last recent job missing the name and not active.
- Panel copies are reported without username.
- Scan here to the cloud storages doesn't refresh the list automatically.
- Roger crashed during stress test 300 jobs.
- Recent workflows don't update automatically.
- Changed parameters for job spooled via MRC are not applied.
- Some jobs stay on terminal after printing.
- Screen stuck at 'loading' after deleting jobs.
- Issues with duplicated workflows.
- Paper's parameter validation error while printing on terminal.

2.2 MyQ Roger terminal for HP 24.1.4 (185)

20 June, 2024

Bug Fixes

- 48.A1.01 Job accounting service error is displayed after Print all jobs.
- Application is crashing.
- Email destination not valid error message is displayed after scanning to email from the Device Panel Parameters page.
- Idle logout is applied during printing.
- Jobs are deleted when MRC is not connected during printing.
- Login via card from HP Home screen is not possible.

- Printed jobs are still displayed as selected in Ready jobs, screen has to be refreshed manually.
 - Screen isn't refreshed correctly after deleting of the jobs.
 - Terminal is crashing when Print all/Select all+Print all jobs from MRC is used.
 - Terminal is loading very slow.
 - User is logged out during card registration.
-

2.3 MyQ Roger terminal for HP 24.1.3 (117)

19 April, 2024

Bug Fixes

- Card registration is not possible on embedded terminal.
-

2.4 MyQ Roger terminal for HP 24.1

2 January, 2024

Improvements

- **NEW FEATURE** : ID card registration
-

2.5 MyQ Roger terminal for HP 2023.08.22(77)

28 August, 2023

Improvements

- It is possible to specify if displaying of the cloud storage files on the device panel is allowed after login via PIN, for security reasons.
 - UI improved.
-

2.6 MyQ Roger terminal for HP 2022.08.23(62)

6 October, 2022

Improvements

- Stability improved.
-

2.7 MyQ Roger terminal for HP 2022.08.08(43)

16 September, 2022

Improvements

- Displaying of Home screen improved.
- Options dialog for the actions improved.
- Scan to @email dialog improved.
- It is now possible to change the language of the application.

Bug Fixes

- Changed parameter for Easy copy from mobile application was ignored.
 - It wasn't possible to change the number of copies on the device panel for Universal print jobs.
 - Login wasn't possible in locked devices.
 - Number of copies was always set to 1 for Universal print jobs.
 - Print all button is displayed when any job is available for printing only.
 - Universal print jobs have been released incorrectly from the Job Options screen.
-

2.8 MyQ Roger terminal for HP 2022.03.23(37)

1 April, 2022

Improvements

- Swiping of jobs is more responsive.
- Error messages for failed Copy/Print/Scan added.
- It is now possible to select a region for Tenant registration.
- Accounting is reported to the server.

Bug Fixes


- Scanning via mobile application to Google Drive fixed.

3 Basic Information

The guide is intended for administrators and describes the MyQ Roger application installation and usage on HP Workpath devices.

The basic prerequisites before the installation are:


- Setup of the MyQ Roger tenant (described in the *MyQ Roger Server Administration* guide).
- The latest FW is recommended (for the latest MyQ Roger version, FS 5.7 or newer is required).
- The MFD should be connected to the HP Command Center (for more information on how to connect, contact your Partner).
- OneDrive should be connected to your tenant and the device.

 The communication protocols and ports used can be found in the MyQ Roger Server Administration guide.

3.1 Supported Devices


The supported devices are models with **Workpath Platform** support.

See the list of supported devices in <https://developers.hp.com/workpath-sdk/compatible-devices>.

 Only the multifunctional devices on this list are supported. For some models, additional memory is required.

4 Pre-Installation Steps

The MyQ Roger app can be installed on HP MFDs as a standard application.

-  The latest FW is recommended (for the latest MyQ Roger version, FS 5.7 or newer is required).

Before installing the MyQ Roger app to your device, you need to:

- Modify the time server settings:** go to the device's web user interface, in **General, Date/Time Settings, NTS Settings**, and in the **Network Time Server Address** field, type *time.windows.com*. You can also modify the rest of the settings there, based on your preferences. Once done, click **Synchronize Now**, and then click **Apply**.

Date/Time Settings

NTS Settings

If a Network Time Server (NTS) is connected to the same network as this product, its IP address was discovered when the product was powered on. To use that NTS, click the "Use Defaults" button. If you want to enter an NTS manually, type the IP address in the field below.

Network Time Server Address: Local Port to Receive Time from Server: (1100-1900)

Synchronize Time with Server every: (1-168) Hours

Time Server Status

Timeout waiting for response from server

- Enable Web Services:** go to the **HP Web Services** tab and make sure that the **Web Services Status** is *Enabled*. If it is disabled, enable it and save the settings.

Web Services Setup

HP Web Services and HPconnected.com

Web Services Status	Enabled
Printer connected to HP Connected	Connected



HP ePrintCenter

HP ePrint [More information.](#)

Product E-mail Address: Printer Code:


Remove printer from HP Connected and HP Web Services. Refresh Device Email Address from HP Connected.

Use the HP Connected website


Use HP's free HP Connected website to set up increased security for HP Connected, specify the email addresses that are allowed to send email to your printer, and access other free services.

- Go to www.hpconnected.com to create an account and enter your printer code to manage your printer
- Go to the HP Connected website for more information and specific terms and conditions: www.hpconnected.com


- Depending on the device model, you should either **Enable JetAdvantage Link platform** or **Enable HP Workpath platform**.
 - To **enable JetAdvantage Link platform:** go to the **Security** tab, scroll down to the **HP JetAdvantage Link Platform** section, and make sure that the **HP JetAdvantage Link platform** is *Enabled*. If it is disabled, enable it, and click **Apply** to save your settings. The device needs to be restarted for the changes to take effect.

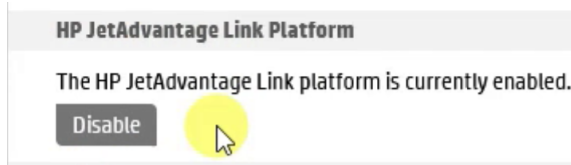


- To **enable HP Workpath platform**: go to the **Security** tab, scroll down to the **HP Workpath Platform** section, and make sure that the **HP Workpath platform** is *Enabled*. If it is disabled, enable it, and click **Apply** to save your settings. The device needs to be restarted for the changes to take effect.

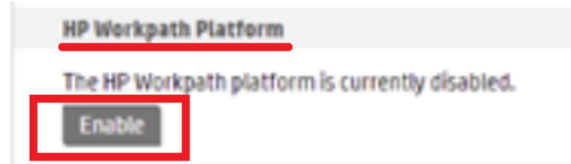


- Once the device is restarted, go to the device panel and click on the **HP Command Center** application.

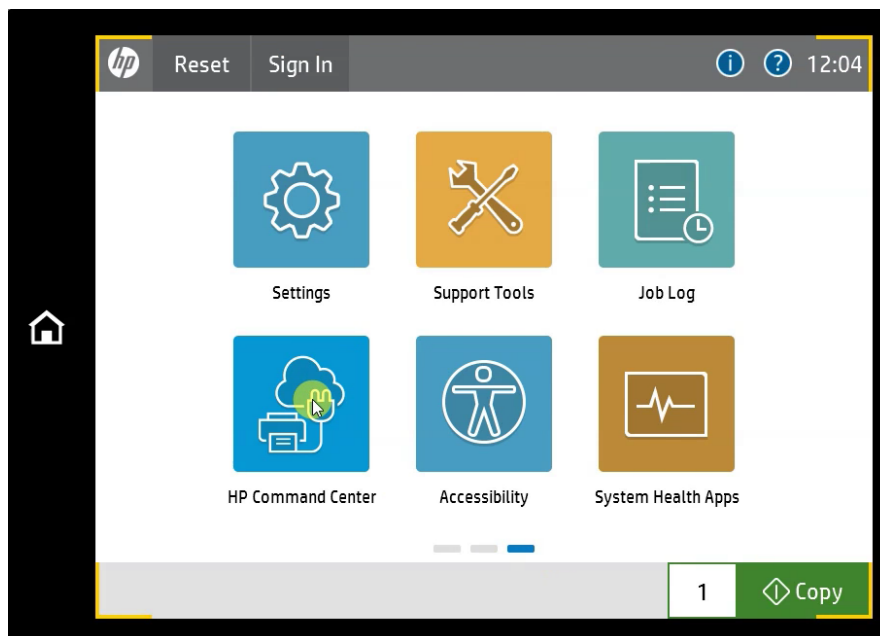

- Click **Continue** on the pop-up window. Once the screen loads, you see the link you need to follow (or a QR code) in order to register your device to HP Command Center, as well as a unique code for verification.

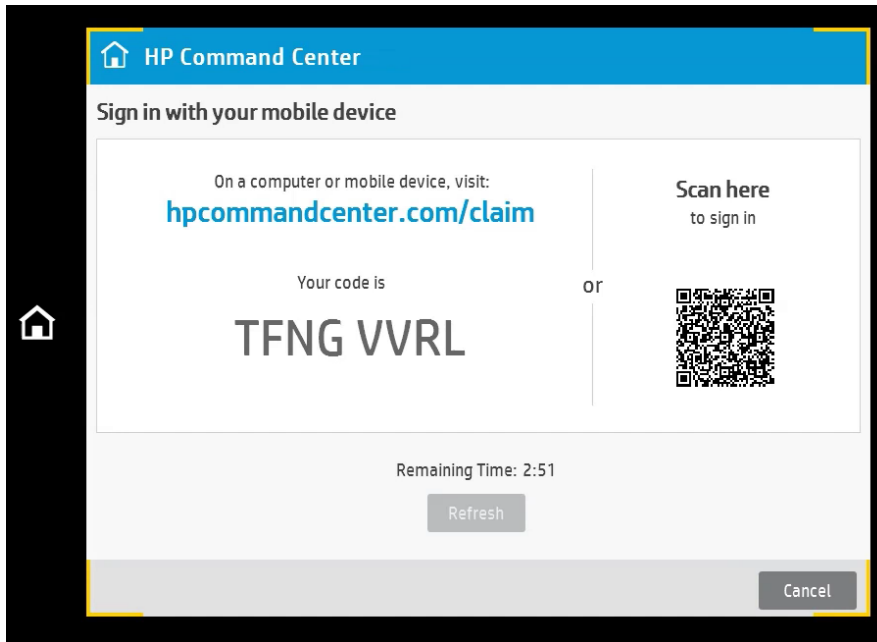

Either visit hpcommandcenter.com/claim on a browser, or scan the QR code with your mobile phone. Be aware that the process is time sensitive; after 4 minutes, the session expires. Log in, enter the verification code and click **Verify**.

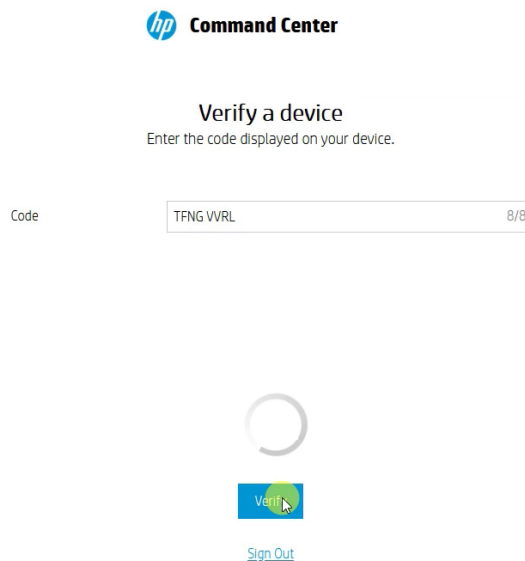


Your device is now registered and verified in the HP Command Center and you can proceed with the MyQ Roger installation.

4.1 Installation on HP MFDs


MyQ Roger Installation on an HP MFD

- Log in to <http://hpcommandcenter.com> and go to the **Solutions** tab.
- Click **All Solutions** and search for MyQ Roger in the search bar.

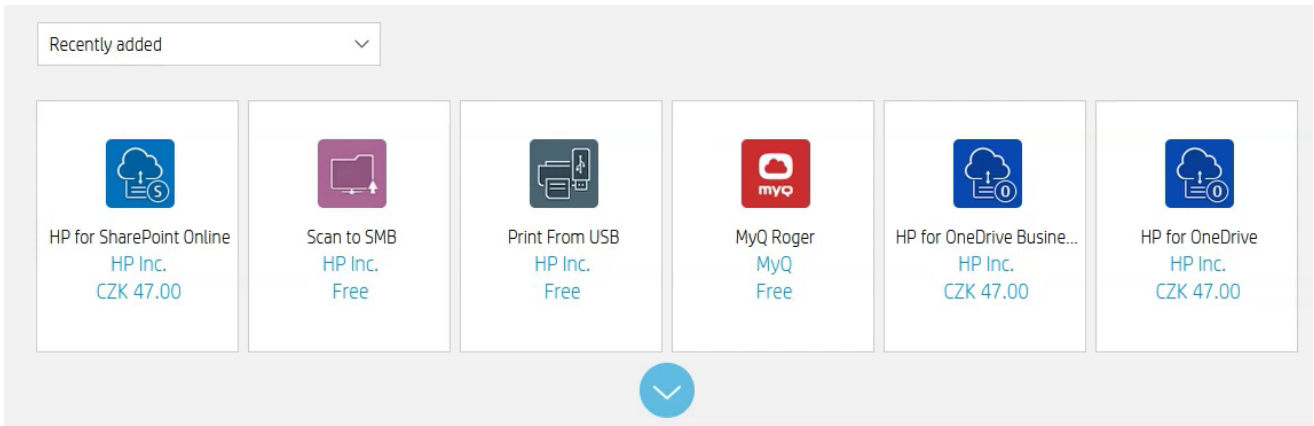

Solutions Catalog

Solutions of the month [All solutions](#)

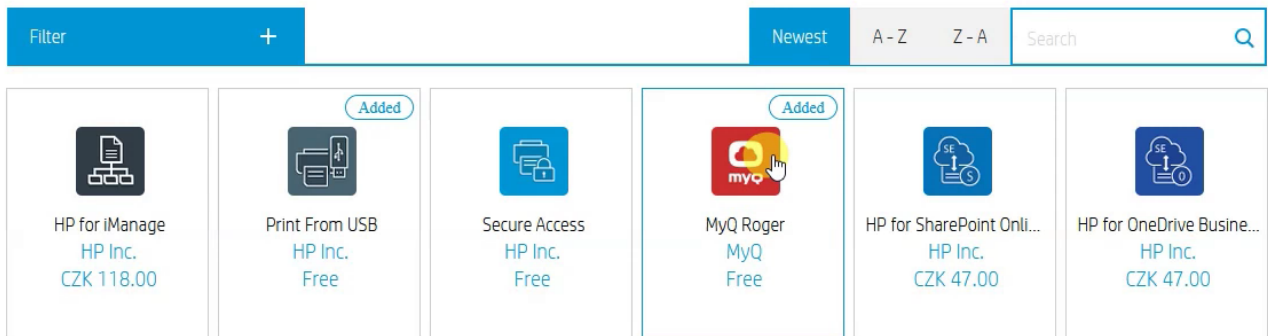

- Select the MyQ Roger app and add it to your solutions portfolio.
- Go to the **Accounts** tab and select your account.
- Click **Assign Device** to add your device to the selected account. In the pop-up window, select the device and click **Add**.

Assign devices

Selected account



Select devices that you want to assign to this account. (5 / 20)

Search

Model name	Serial number	Asset number
<input checked="" type="checkbox"/> HP LASERJET MFP M528		

Number of devices selected: 1 [Unselect all](#)



- On the left column, under **Solutions**, select MyQ Roger, and click **Manage**.

<p>Solutions(6) Add solutions</p> <p>Search</p> <p>Scan to SMB Installed on 0 devices</p> <p>Print From USB Installed on 0 devices</p> <p>MyQ Roger Installed on 3 devices Delete Manage</p> <p>HP for OneDrive Business Installed on 0 devices</p> <p>HP for OneDrive Installed on 0 devices</p> <p>Scan to Email Installed on 0 devices</p>	<p>Devices(5 / 20) Assign devices</p> <p>Search</p> <p>HP PAGEWIDE COLOR MFP E58650 Serial No. 1 solutions installed</p> <p>HP PAGEWIDE COLOR FLOW E58650 Serial No. 0 solutions installed</p> <p>HP LASERJET MFP M528 New Serial No. 0 solutions installed</p> <p>HP COLOR LASERJET MFP M577 New Serial No. 1 solutions installed</p> <p>HP COLOR LASERJET FLOWMFP M681 Serial No. 1 solutions installed</p>
---	--

- In the pop-up window, wait for the device list to load, and then click **Install**.

Manage solution

MyQ Roger

Install >

Uninstall >

Configure >

Installation Status

All

Model name	Serial number	Asset number	Status
HP COLOR LASERJET F...			Installed
HP COLOR LASERJET ...			Installed
HP LASERJET MFP M5...			Not installed
HP PAGEWIDE COLOR ...			Incompatible dev...
HP PAGEWIDE COLOR ...			Installed

Close

- Select the device where you want to install MyQ Roger and click **Next**.

< Install

The screenshot shows a progress bar at the top with three steps: 'MyQ Roger', 'Select target devices' (which is the active step), and 'Install'. Below the progress bar, the 'Select target devices' section contains the following elements:

- A 'Share configuration: Off' toggle.
- A dropdown menu set to 'All' and a search box.
- A table with columns: Model name, Serial number, Asset number, and Status.
- A single row in the table:

<input checked="" type="checkbox"/>	Model name	Serial number	Asset number	Status
<input checked="" type="checkbox"/>	HP LASERJET MFP ...			Not installed
- A footer area with 'Selected devices: 1' and a link to 'Unselect all', followed by a notice: 'NOTICE: By installing this solution sold by partner companies, you are agreeing to partner terms and usage fees.'
- 'Previous' and 'Next' navigation buttons at the bottom.

- Select whether you want to install the application now (recommended), or schedule it for later (up to 72 hours), and click **Install**.

< Install

The screenshot shows the progress bar with 'Install' as the active step. The main content area is titled 'Install' and includes:


- A tip: 'Tip: If you choose not to install this solution now, you can install it up to 72 hours later.'
- Two radio button options: 'Install now' (which is selected) and 'Schedule installation'.
- 'Previous' and 'Install' navigation buttons at the bottom.

- A new task is created and the application is being installed in the background. Click **Done**.

< Install



Task created successfully!

Solution	 MyQ Roger
Task	Install
Target devices	1
Schedule	At Install now



4.2 Device Configuration

You can further configure the device's SMTP and scanning options, the device's and MyQ Roger app's language, and panel operations options for locked devices.

4.2.1 SMTP and Scanning Options

This setting is required for using scan to @me, scan to @email, and panel scan operations.

- Open the web UI of the device.
- Log in as administrator.
- Open **Scan/Digital Send > Email Setup > Default Job Options**.
- **Enable Scan to Email**.

Email Setup > Default Job Options

This feature allows users to scan documents and send them as email attachments to one or more email addresses.

Enable Scan to Email

- Configure the Outgoing Email Servers (SMTP).
 - Add the SMTP server.

Outgoing Email Servers (SMTP)

Server Name	Port Number
<input type="text"/>	25

- Enter the SMTP address and the number of the server port.

Set the basic information necessary to connect to the server.

(0-100.00)

Enable SMTP SSL/TLS Protocol

The email will be split into multiple emails if larger than the specified size. If the value is 0 the email will not be split.

- Configure the authentication of the SMTP server (related to SMTP Server configuration).

Outgoing Email Servers (SMTP)

Server Authentication Requirements

Server does not require authentication
 Server requires authentication

Show

Verify Access

- Configure Address and Message Field Control.

Address and Message Field Control

Select the desired setting for each field and whether the field can be edited by the user at the control panel. If any selections require users to sign in, set the base application to require signing in by navigating to the Security tab.

From:
 User editable

Default From:
Default Display Name:

Note: This is an optional setting. If set, the display name is shown at the control panel rather than the Default From: address.

Subject: User editable

Message: User editable

4.2.2 Enabling Virtual Keyboard

Some devices without an external hardware (HW) keyboard may have their Virtual Keyboard disabled making it not possible to enter text to textboxes (i.e. login via username and password, login as device administrator, entering email address...).

This setting is required on devices without an external HW keyboard and optional on devices with an external HW keyboard.

- Open the web UI of the device.
- Log in as administrator.

- Open **General > Control Panel Customization > Control Panel Language and Keyboard Layouts**.
- Mark the **Enable Virtual Keyboard** checkbox and click **Apply**.

Control Panel Customization > Control Panel Language and Keyboard Layouts Help

Control Panel Language and Keyboard Layouts

Select the default language for control panel messages and specify the default keyboard layout for each language. When changes are applied, the selected language will be set as default on control panel and all keyboard layout changes will be saved.

Language	Keyboard Layout
<input type="radio"/> Magyar	Hungarian (QWERTZ)
<input type="radio"/> Ελληνικά	Greek
<input type="radio"/> Hrvatski	Croatian
<input type="radio"/> Română	Romanian

Allow users to choose another language for their session

Show alternate keyboard button on keyboard screens

All selected keyboard layouts will be available at the control panel when the alternate keyboard button is touched.

Keyboard Layout

- Arabic
- Belgian (Comma)
- Belgian (Period)
- Bulgarian

Enable Virtual Keyboard

Apply Cancel

4.2.3 Locking the Device

This setting is optional if the panel operations should be locked for unauthenticated users.

- Open the web UI of the device.
- Login in as administrator.
- Open **Security > Access control**.
- **Disable Device Guest**.
- Change the default **Sign-In Method**.
 - **Local Device** for possibility of login for the device administrator.

Sign-In and Permission Policies

Click the icons below to change settings. Set sign-in requirements at the control panel by allowing or denying Guest access. Guests are users who have not signed in to use the product. The remaining permissions can be applied to local user accounts stored on the product or to network users and groups.

Control Panel	Device Guest	Device Administrator	Device User	Sign-In Method
MyQ Roger			<input checked="" type="checkbox"/>	Local Device
Settings			<input checked="" type="checkbox"/>	Use Default

- **Roger Authentication** for displaying the Roger screen only.

Sign-In and Permission Policies

Click the icons below to change settings. Set sign-in requirements at the control panel by allowing or denying Guest access. Guests are users who have not signed in to use the product. The remaining permissions can be applied to local user accounts stored on the product or to network users and groups.

Control Panel	Device Guest	Device Administrator	Device User	Sign-In Method
MyQ Roger				Roger Authentical
Settings				Local Device
				Use Default

4.2.3.1 Login with the possibility of login with device administrator

- Press the **Sign In** button on the device panel.





Sign-in is required to use this product.

- It is possible to log in as a device administrator.

The image shows a 'Sign In' screen. At the top, there is a header bar with a back arrow, a dropdown menu set to 'Local Device', and the text 'Sign In' with a question mark icon. Below the header, there is a section titled 'Access Type' with a dropdown menu set to 'User Access Code'. Underneath, there is a section titled 'Access Code' with an empty text input field. At the bottom of the screen, there is a numeric keypad with buttons for digits 1-9 and 0, a backspace button with an 'X' icon, and a blue 'Sign In' button.

- Or change the login screen to MyQ Roger.

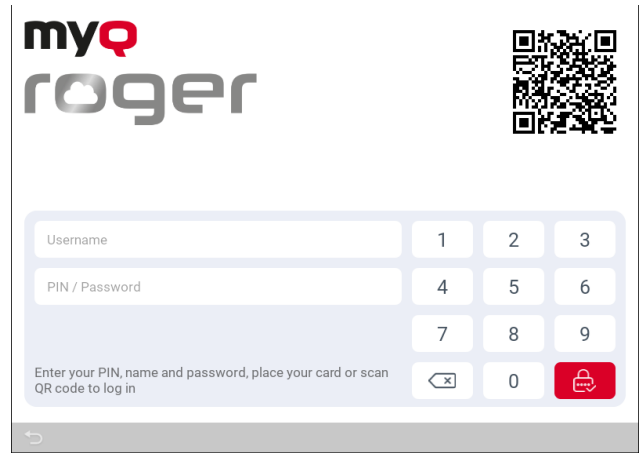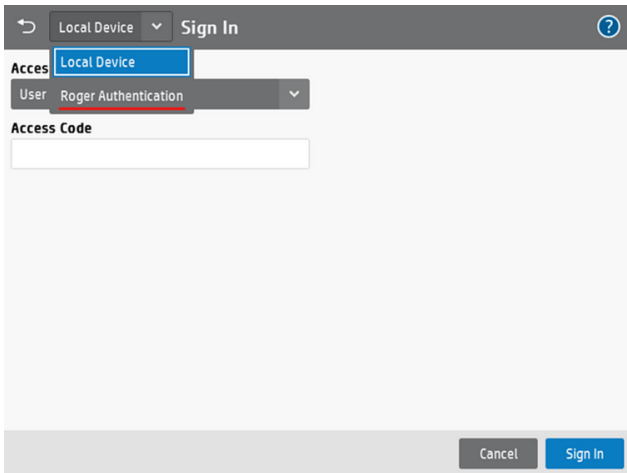


4.2.3.2 Login with the possibility of login without device administrator

- Press the **Sign In** button on the device panel.



Sign-in is required to use this product.

- Login to MyQ Roger.

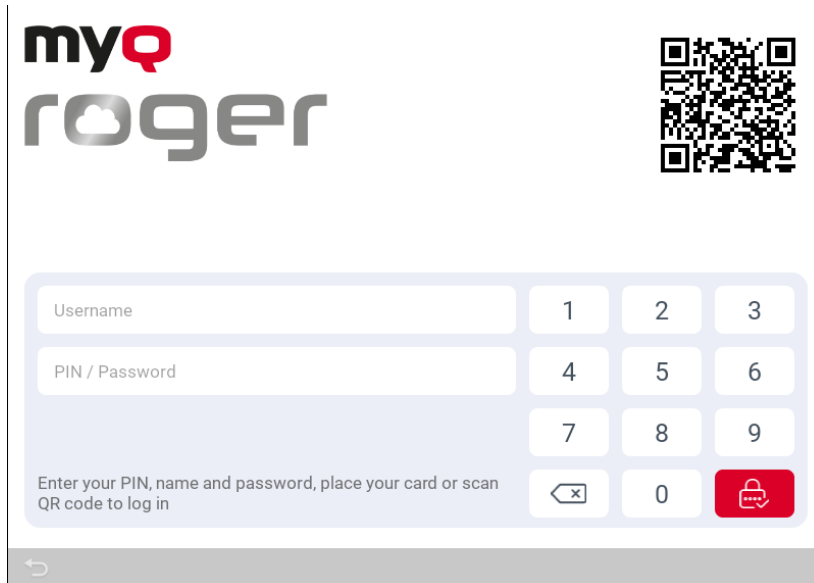


4.2.4 Language Settings

It is possible to change the language of the MyQ Roger application to several languages. Currently, the application is translated to Czech, English (default), French, German, Italian, Polish, and Spanish.

4.2.4.1 Language of the Login Screen

The language of the login screen is set by the language set in the device.

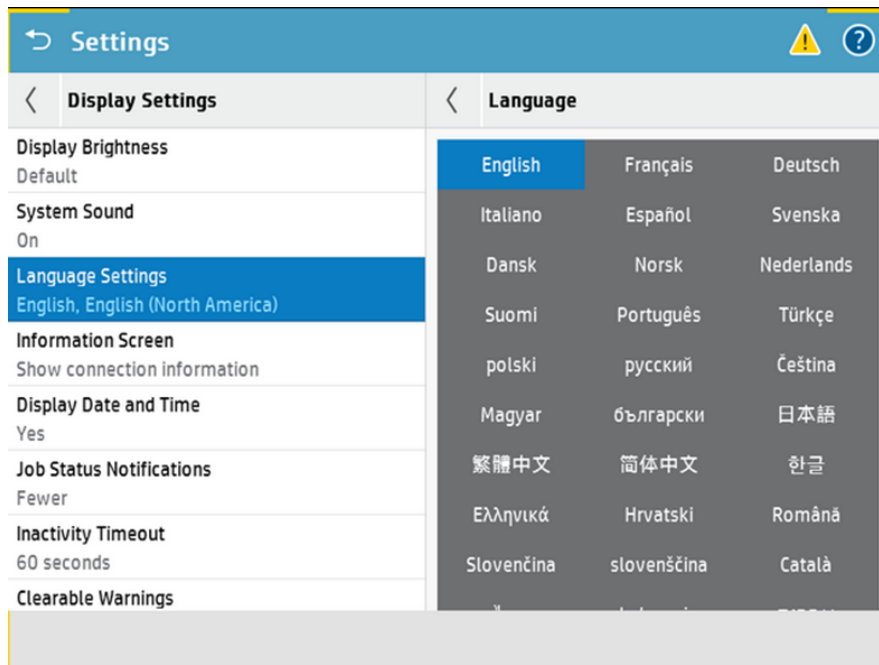

4.2.4.2 Language of the Application

The language of the Top menu is set by the language set in the MyQ Roger web UI.

- Go to the MyQ Roger Web UI, in Administration > Settings > General.
- Set the **Default language**.

Settings Show and change application settings. Save all

General Appearance User management Security Appearance External Login Settings

Timezone
Default [UTC]

Default currency
EUR (€)

Default language
English

Roger Internal | API: v11.1.0 | Client: v11.1.0 [20230803]

5 MyQ Roger Mobile App Setup

The MyQ Roger mobile application can be used both on iOS and Android devices, including Chromebook devices, and it is available for free download in the App Store and in Google Play.



BACK TO START

After the download and installation of the app, tap the MyQ Roger app icon to open it.

Go through the mini welcome guide, and then choose the account you want to use from the **WORK ACCOUNT** or the **PERSONAL ACCOUNT** options.



Which account do you want to use?

WORK ACCOUNT

Created and provided by your company

PERSONAL ACCOUNT

Don't you have any? **Sign up!**



By choosing **WORK ACCOUNT**, you can log in to the MyQ Roger tenant created and provided by your company, with multiple sign in options.

✕ Sign in to your work account

Tenancy name provided by your company

 Sign in with MyQ

OR

 Sign in with Google

 Sign in with Microsoft

By logging in, you agree with [MyQ's Privacy Policy](#) and with processing of data for business and marketing purposes by MyQ spol. s.r.o. and its regional branches.

v 2021.9.22

In the **Tenancy name** field, type the name of your tenant. Then choose one of the available sign in options:

- **Sign in with MyQ** - Type your MyQ Roger credentials and tap **SIGN IN**.

← Sign in to your work account

Username / E-mail address

Password

SIGN IN

- **Username / E-mail address** - Your MyQ Roger user name or email address.
- **Password** - your MyQ Roger password.
- **Sign in with Google** - You are redirected to log in to your Google account.
- **Sign in with Microsoft** - You are redirected to log in to your Microsoft account.

By choosing **PERSONAL ACCOUNT**, you can use a personal MyQ, Google or Microsoft account to use the app.

× Sign in to your personal account



Sign in with MyQ

OR



Sign in with Google



Sign in with Microsoft

By logging in, you agree with [MyQ's Privacy Policy](#) and with processing of data for business and marketing purposes by MyQ spol. s.r.o. and its regional branches.

v 2021.9.22


← Sign up to your personal account

I agree with the processing of the above data for business and marketing purposes by MyQ spol. s.r.o. and its regional branches. [More about MyQ's Privacy Policy here.](#)

If you don't have an account related to MyQ Roger, you can tap **Sign up!** and create a new personal account either in MyQ, Google or Microsoft.

Fill in the mandatory fields, First name, Last name, E-mail address, Country, Password, and Confirm password, mark that you agree with MyQ Roger processing your data and tap **SIGN UP**.

Once logged in to the app, simply use the **Log in** button at the bottom-center of the screen to scan the QR code displayed on the MFD.

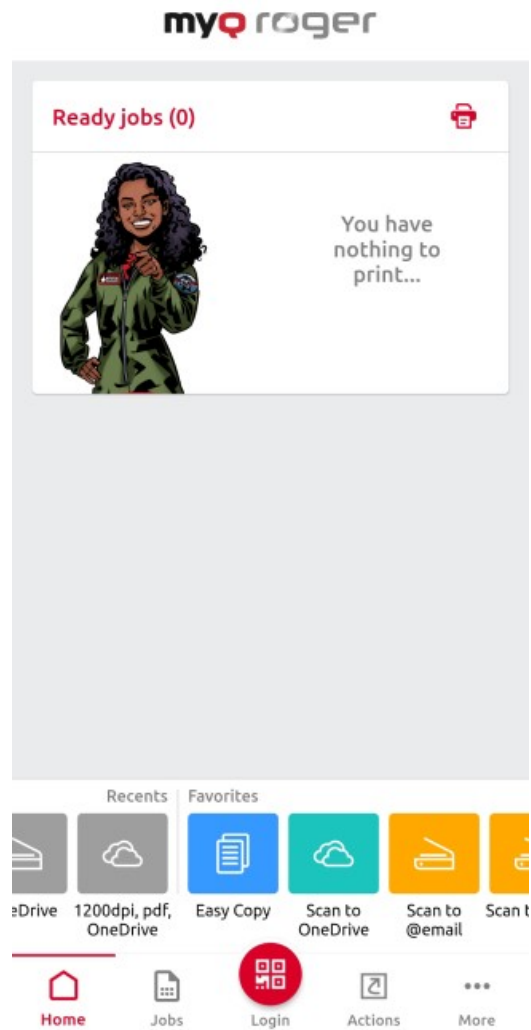

If you would like to add a new printer to your tenant, follow the installation instructions above, to install the terminal package on the printing device. Once installed, open your MyQ Roger mobile app and use the **Log in** button at the bottom-center of the screen to scan the QR code displayed on the MFD.

This way, the connection between your MyQ Roger tenant, your MFD, and your smart phone is established. After choosing the region and scanning the QR code, you see the **Printer successfully paired** notification on your mobile, and the MyQ Roger log in-screen on your MFD.

There are more possible scenarios when scanning the QR code on the printer, that are also dependent on the user's permissions:

1. The printer has not been registered yet with any tenant:
 - a. If the user has standard permissions (print, scan, etc.), they cannot pair the device. It fails and an error message is displayed on the mobile phone.
 - b. If the user has admin permissions (device pairing), they are able to pair the device with a tenant. The new record of the printer is created under the tenant, and the printer is immediately active. A new QR code is displayed and any user on that tenant is able to log in.


2. The printer is registered (paired with the same tenant as the user):
 - a. The user (with standard and/or admin permissions) is logged in to the printer and can control it via their mobile phone.
3. The printer is registered with a different tenant:
 - a. Since the printer is paired with a different tenant, it cannot be used, and an error message is displayed on the mobile phone.

i It's not possible to bring up the registration screen (with the QR code) on a device once it has been paired to a tenant. The administrator should either release the pairing on the server, or do a fresh re-installation of the embedded application (delete it from the device, and then re-install it).


6 Registration of MyQ Roger to the Tenant

To register a printing device to your tenant, you need to first select your region on the MFD, and then use the MyQ Roger mobile app to scan the QR code displayed on the MFD.


In the MyQ Roger screen on the MFD, tap on the flag in the lower-left corner to select your region.

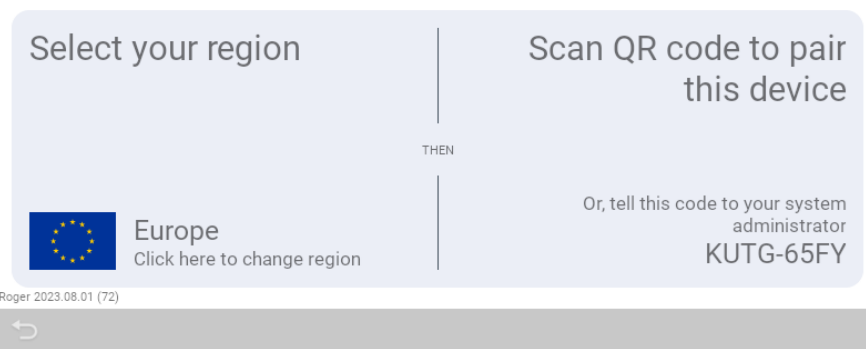


Choose the region in the pop-up, either *Europe* or *Americas*.

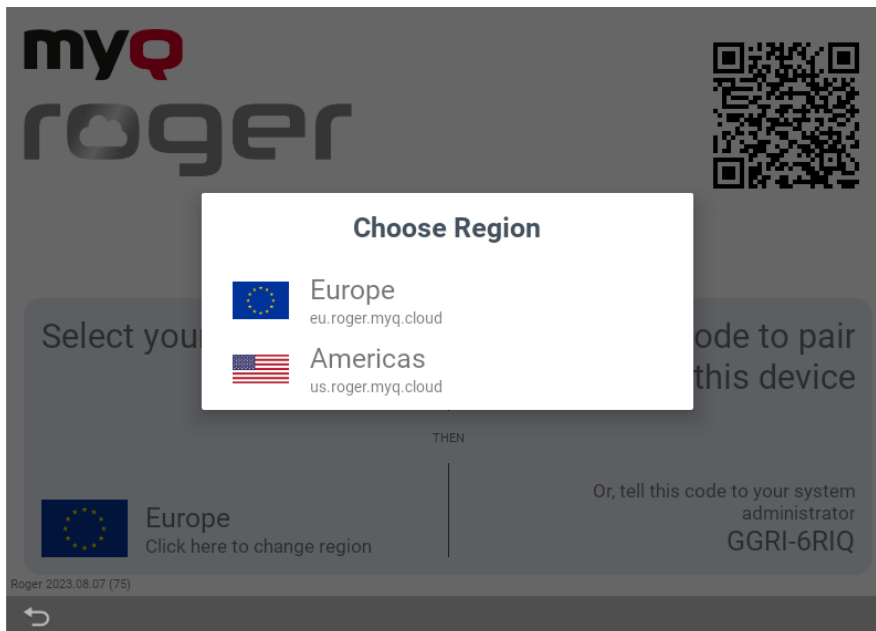

Scan the QR code to pair the device.

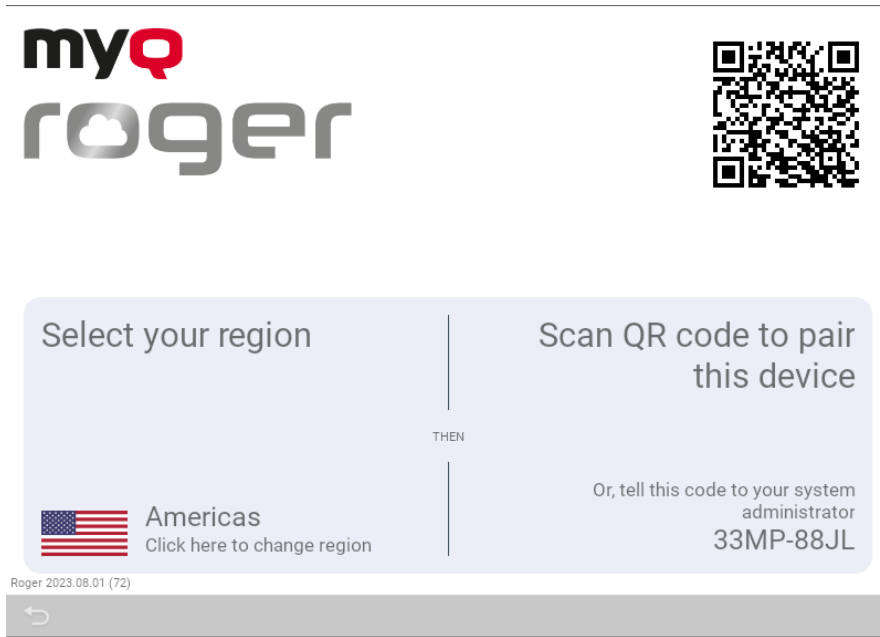

After the connection between MyQ Roger, your MFD, and your smart phone is established, you can immediately use MyQ Roger, either via your smart phone (recommended), or via the device panel.

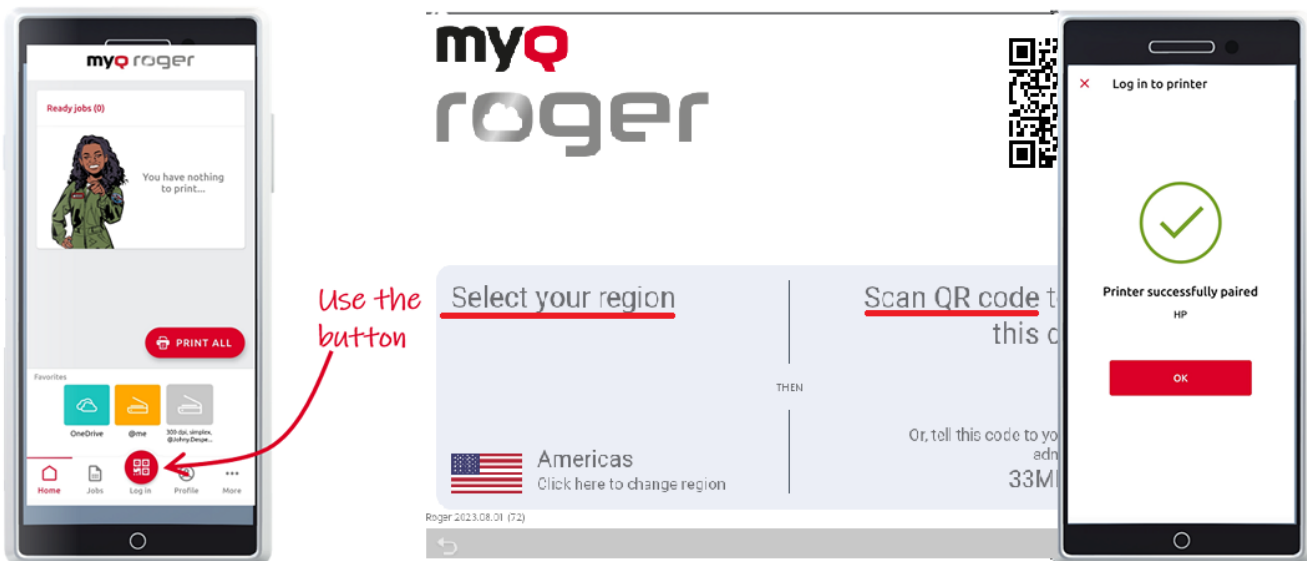


6.1 Information about Terminal Version and Connected Tenant

It is possible to display information about the terminal version and information about the connected tenant on the device panel.

- Display the MyQ Roger login screen.
- Press the MyQ Roger logo.

- Information about the terminal version and information about the connected tenant is displayed.

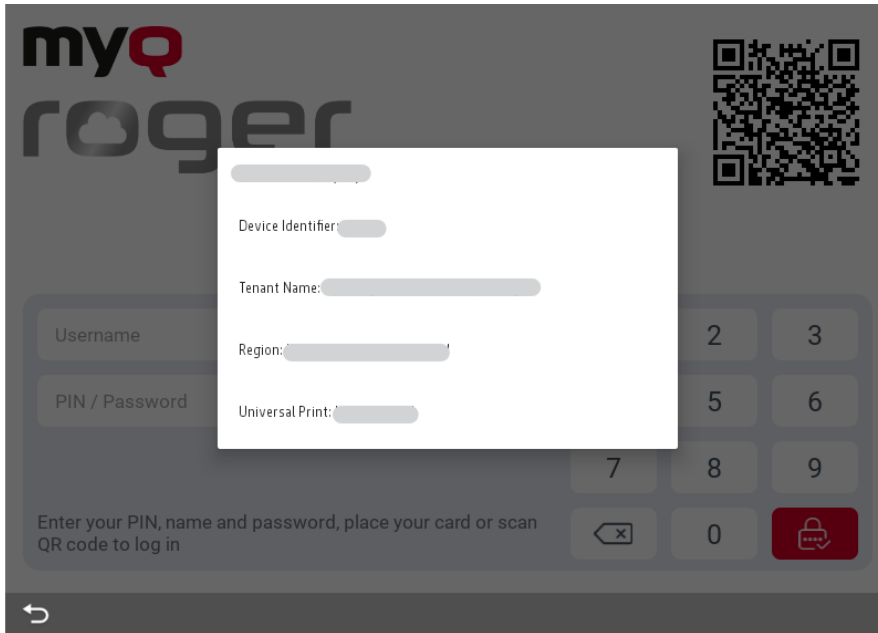

7 Using MyQ Roger

7.1 Usage of the Terminal


⚠ Please note that a device with MyQ Roger connected to the HP command center **must be synchronized at least once per month**. If it's not used for more than 30 days, you will receive the following error message on the device: ***"This app has been disabled. The product could not access security web services for at least 30 days, or the app is no longer approved by security web services. Contact support."*** If this happens, **MyQ Roger must be reinstalled**.

7.1.1 Log in

Depending on the administrator's setup, there are multiple login options available on the device panel:

- **Username and password** - Type your MyQ Roger username and password.
- **Username and PIN** - Type your MyQ Roger username PIN.
- **ID Card** - Swipe your ID Card.
- **PIN** - Type your MyQ Roger PIN.
- **QR code** - Scan the QR code with your smart phone via the MyQ Roger mobile app (recommended).

If you log in by scanning the QR with your smartphone, you can manage everything via the MyQ Roger app. You cannot use the device panel unless you **pass the control to the printer**, via the button on the top-right corner in the MyQ Roger mobile app **Home** tab.

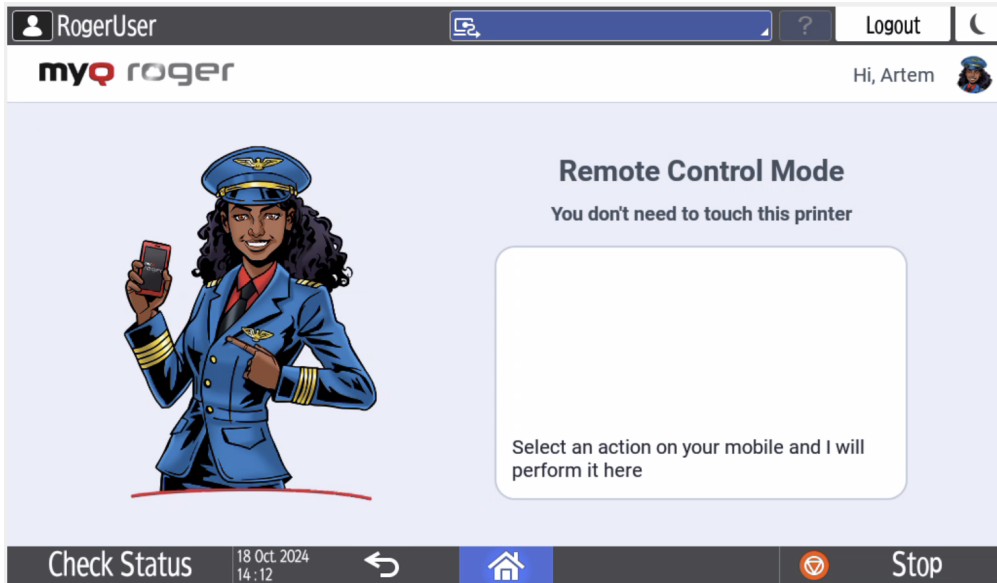


The currently running operation is displayed on the MFD’s display if the device is managed via the MyQ Roger app.

If you use a different login method, you can manage everything directly from the MFD.


7.1.2 MyQ Roger Available Actions

Depending on your MyQ Roger tenant settings, as well as the administrator’s setup, the available actions are:


- **Ready to print** - This action shows all the jobs that are in the ready state.

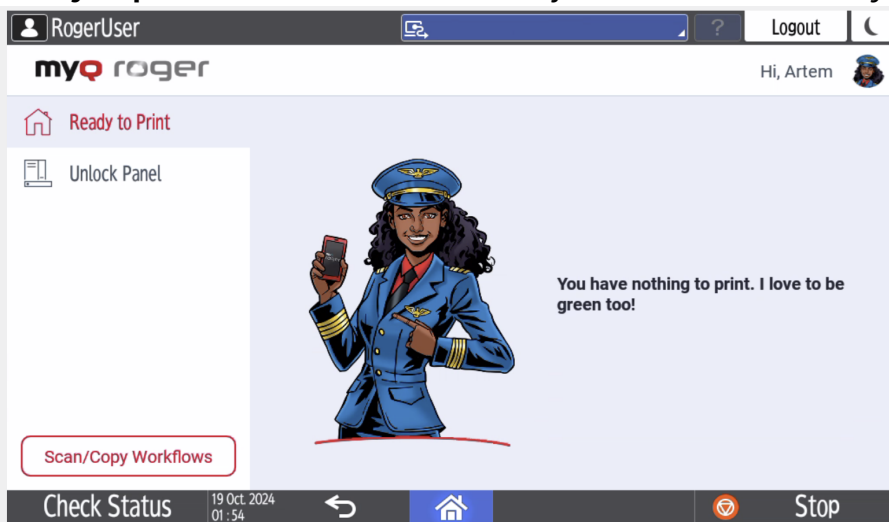


If the control is to the printer, select a job or multiple jobs and swipe from left to right to print it.

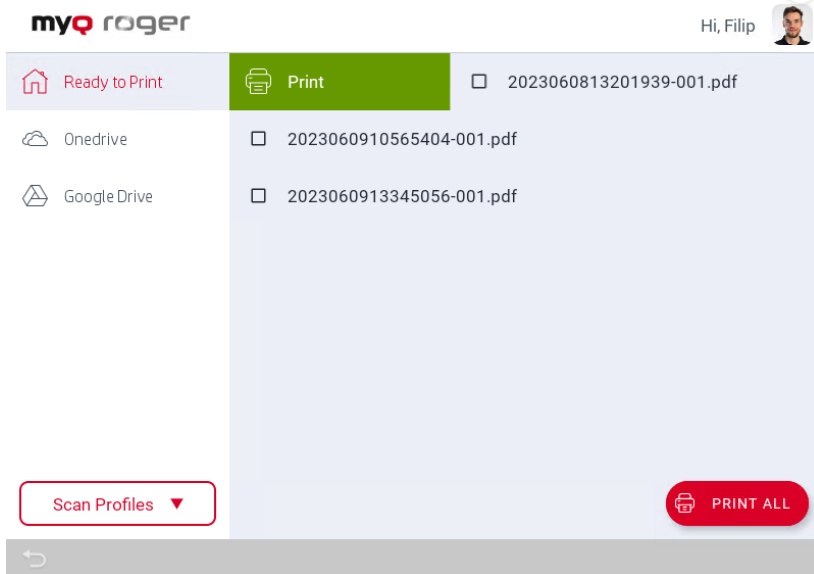

You can also swipe all the way for printing options.

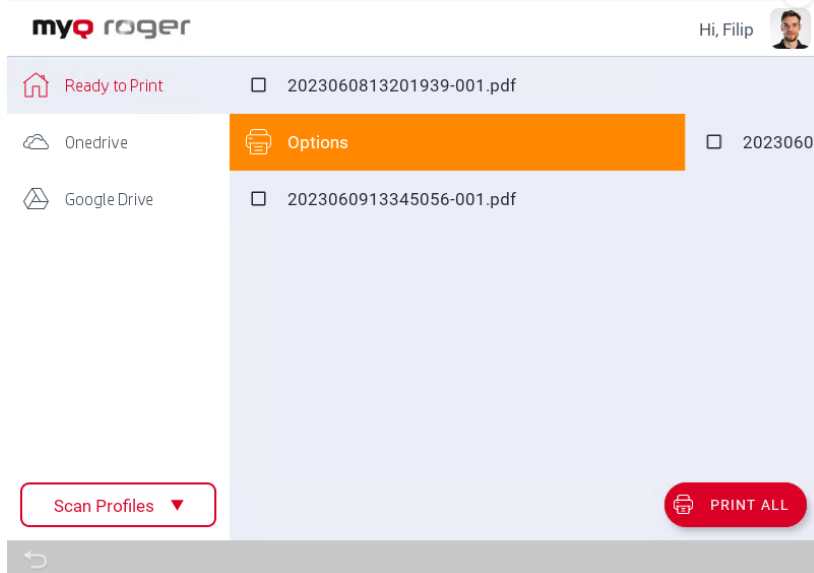


If you swipe from right to left, the job is deleted.

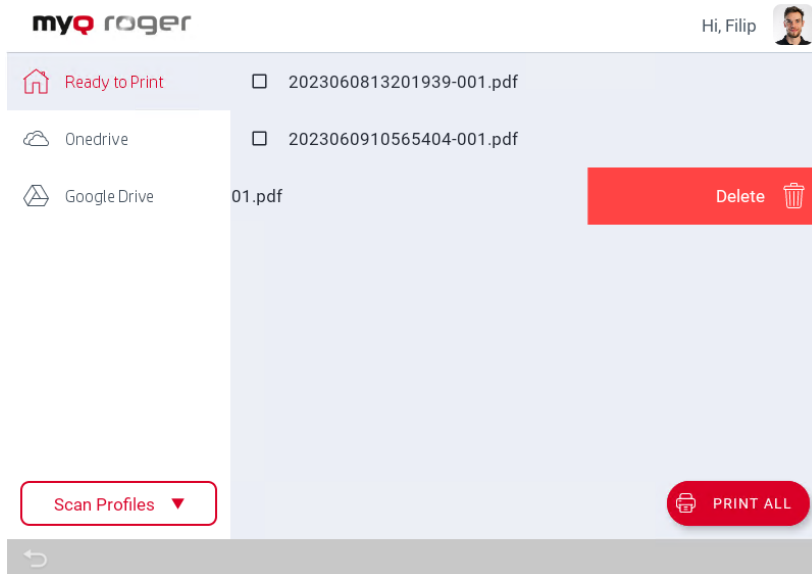


If it's on the mobile app, you have the same swiping options or else you can select the job(s) and tap **Print** or **Print All**.

- **OneDrive** - This action is displayed if OneDrive is connected or if no cloud storage is connected at all. This action shows all the jobs that can be printed, stored on **OneDrive**. If the control is to the printer, select a job and swipe from left to right to print it or just tap on the job to edit the job options.

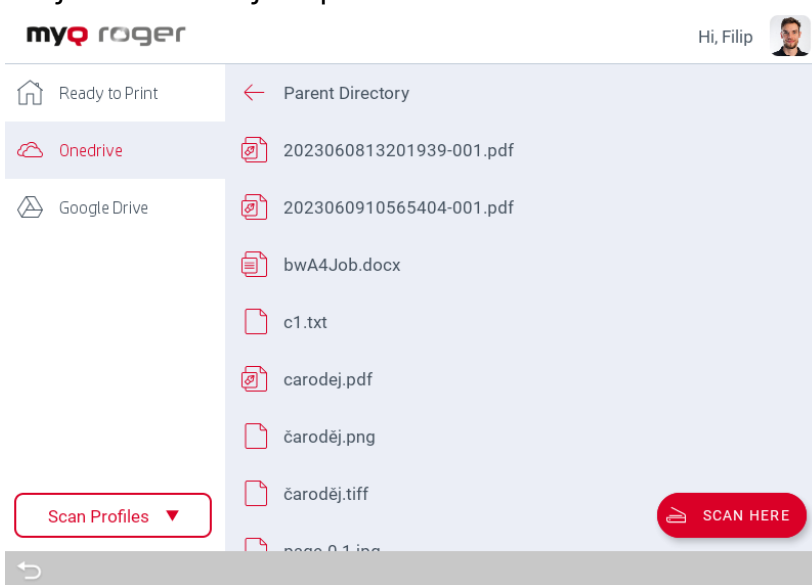


It is not recommended to use login via the PIN method for displaying the cloud storage files on the device panel because of security reasons. Currently there are two possibilities of behavior after login via PIN related to settings on the MyQ Roger Web UI. This behavior is related to the PIN login method only. Login via username and password, card or via mobile device is working without any limitations.


1. An information message is displayed after opening the OneDrive storage. After pressing OK on this message, the OneDrive storage is displayed and it is possible to browse the OneDrive folders and files.

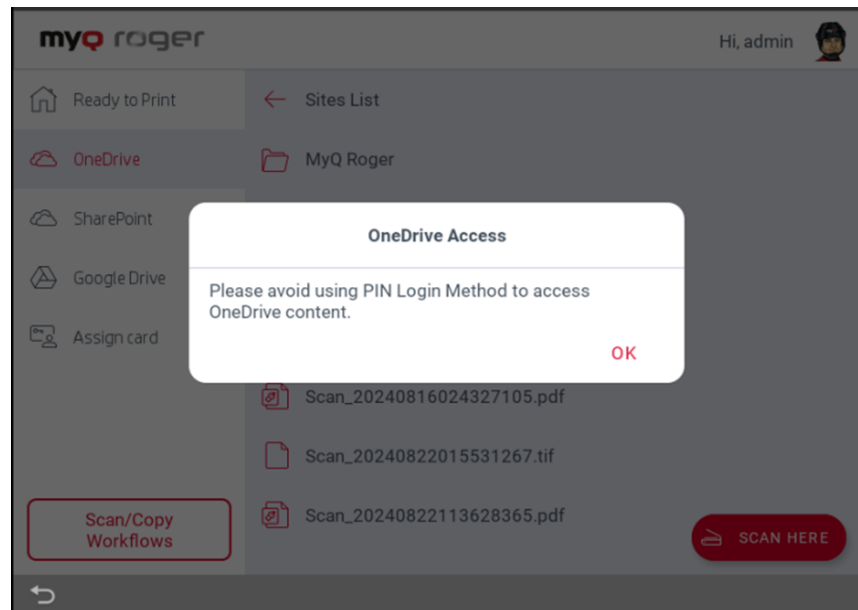


2. OneDrive storage files are not displayed at all.

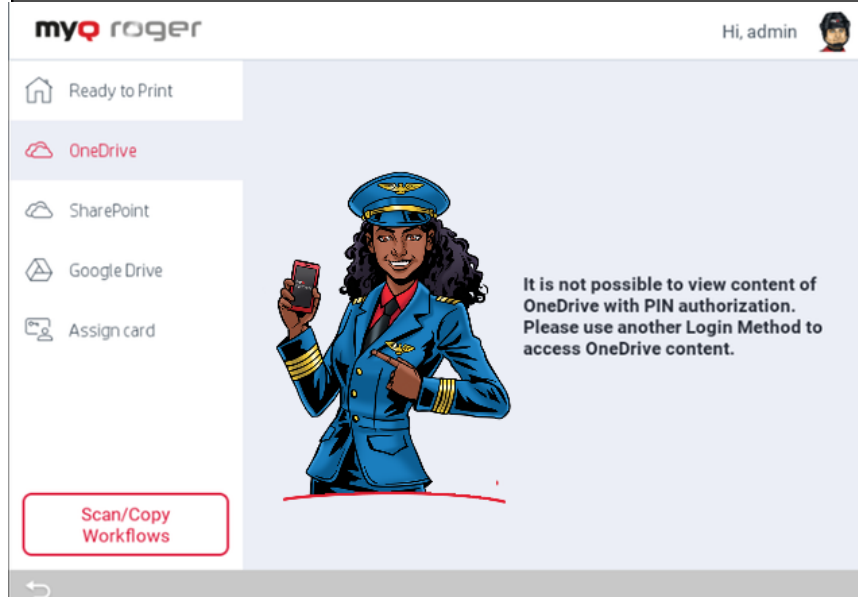

- There is also the **Scan here** feature, which scans your documents and saves the scans to **OneDrive**. If the control is on the mobile app, select the job (listed in the OneDrive tab) and tap **Print** or **Print All**. It is possible to print files in pdf, MS Office and Google Docs formats only on HP from OneDrive storage.

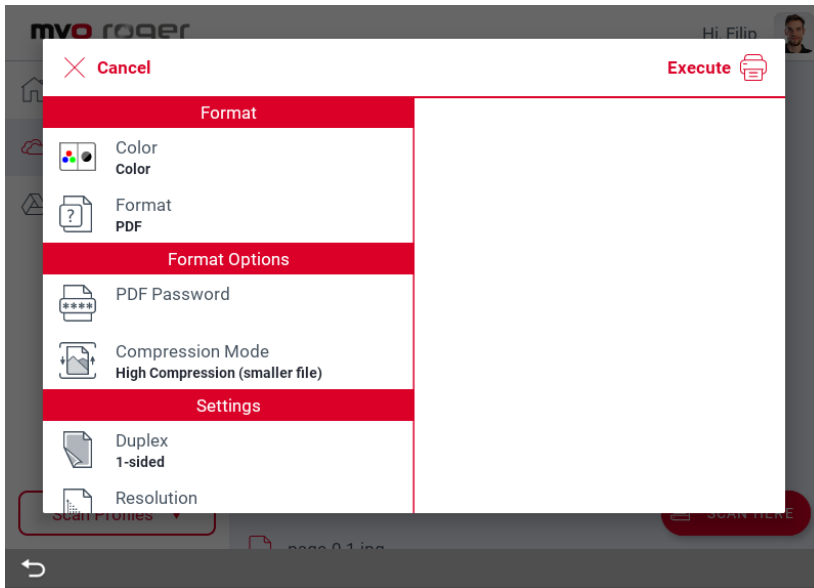


- **Google Drive** - This action is displayed if Google Drive is connected or if no cloud storage is connected at all. This action shows all the jobs that can be printed, and stored on **Google Drive**. If the control is to the printer, select a job and swipe from left to right to print it, or just tap on the job to edit the job options.

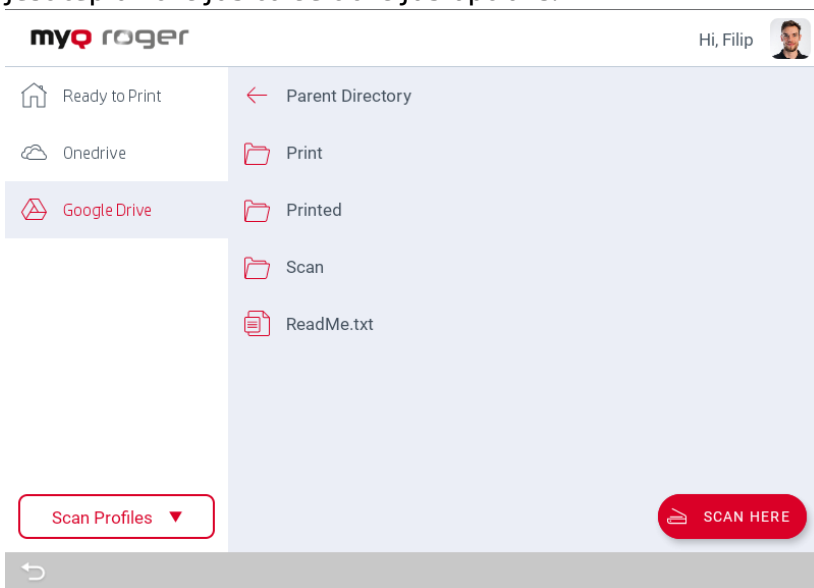


It is not recommended to use login via the PIN method for displaying the cloud storage files on the device panel because of security reasons. Currently, there are two possibilities of behavior after login via PIN related to settings on the MyQ Roger Web UI. This behavior is related to the PIN login method only. Login via username and password, card, or via mobile device is working without any limitations.


1. An information message is displayed after opening the Google Drive storage. After pressing OK on this message, the Google Drive storage is displayed and it is possible to browse the Google Drive folders and files.

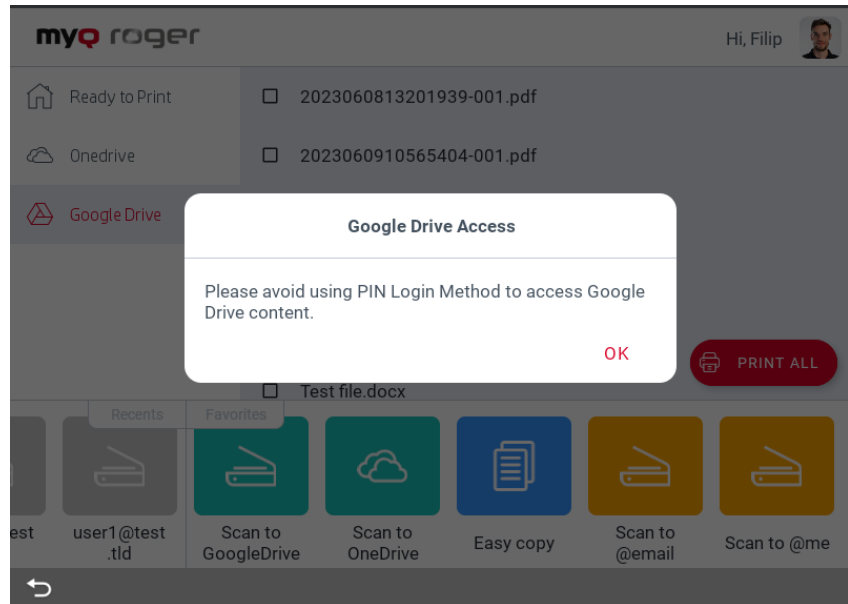


2. Google Drive storage files are not displayed at all.

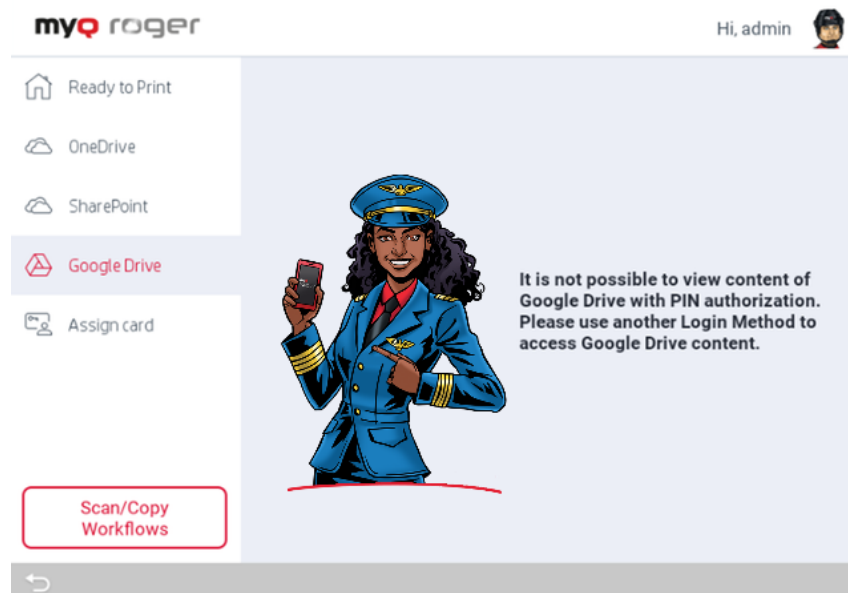

- There is also the Scan here feature, which scans your documents and saves the scans to Google Drive. If the control is on the mobile app, select the job (listed in the Google Drive tab) and tap Print or Print All. It is possible to print files in PDF format only on HP from Google Drive.

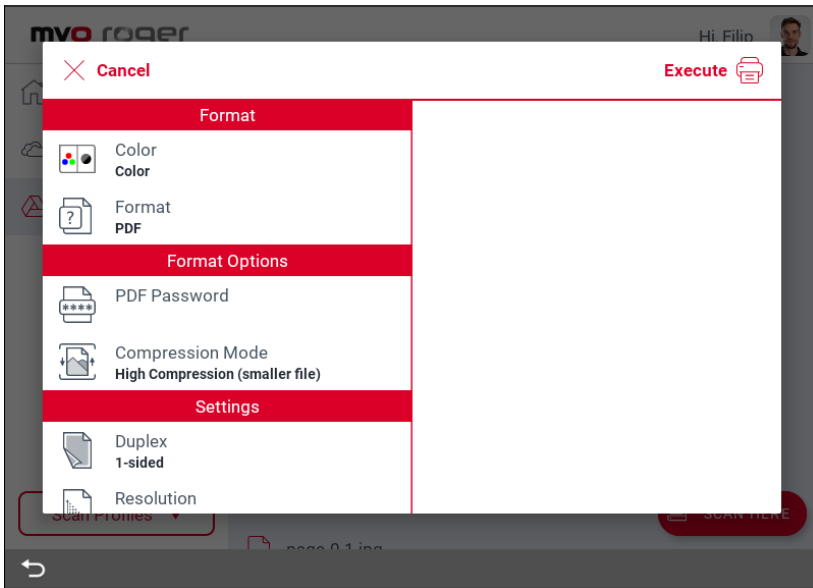


- **SharePoint** - This action is displayed if SharePoint is connected or if no cloud storage is connected at all. This action shows all the jobs that can be printed, and stored on **SharePoint**. If the control is to the printer, select a job and swipe from left to right to print it or just tap on the job to edit the job options.

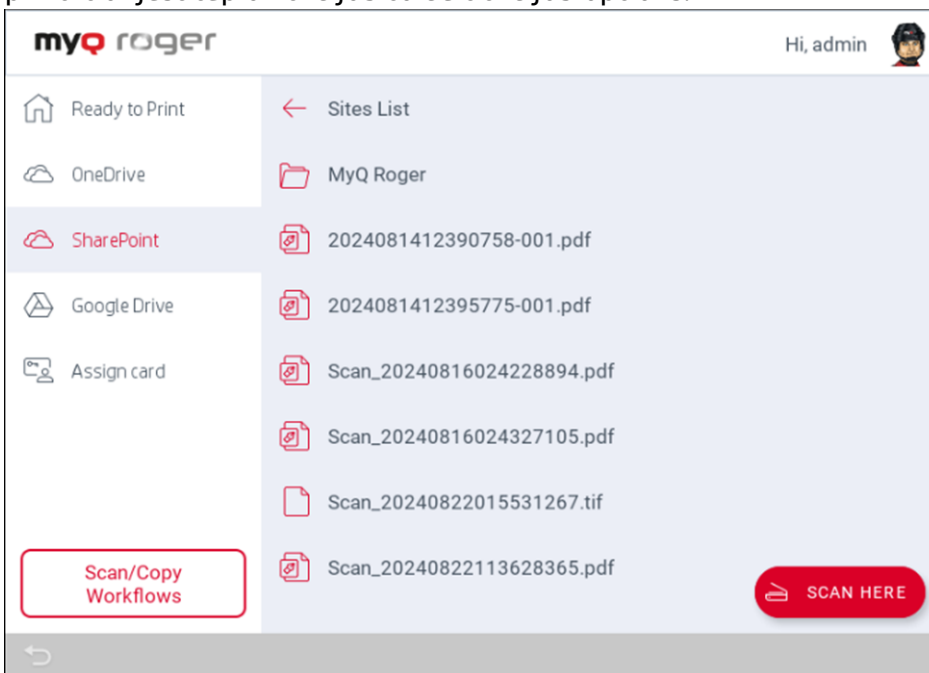


It is not recommended to use login via the PIN method for displaying the cloud storage files on the device panel because of security reasons. Currently, there are two possibilities of behavior after login via PIN related to settings on the MyQ Roger Web UI. This behavior is related to the PIN login method only. Login via username and password, card, or via mobile device is working without any limitations.

- An information message is displayed after opening the SharePoint storage. After pressing OK on this message, the SharePoint storage is displayed and it is possible to browse the SharePoint folders and files.


b. SharePoint storage files are not displayed at all.

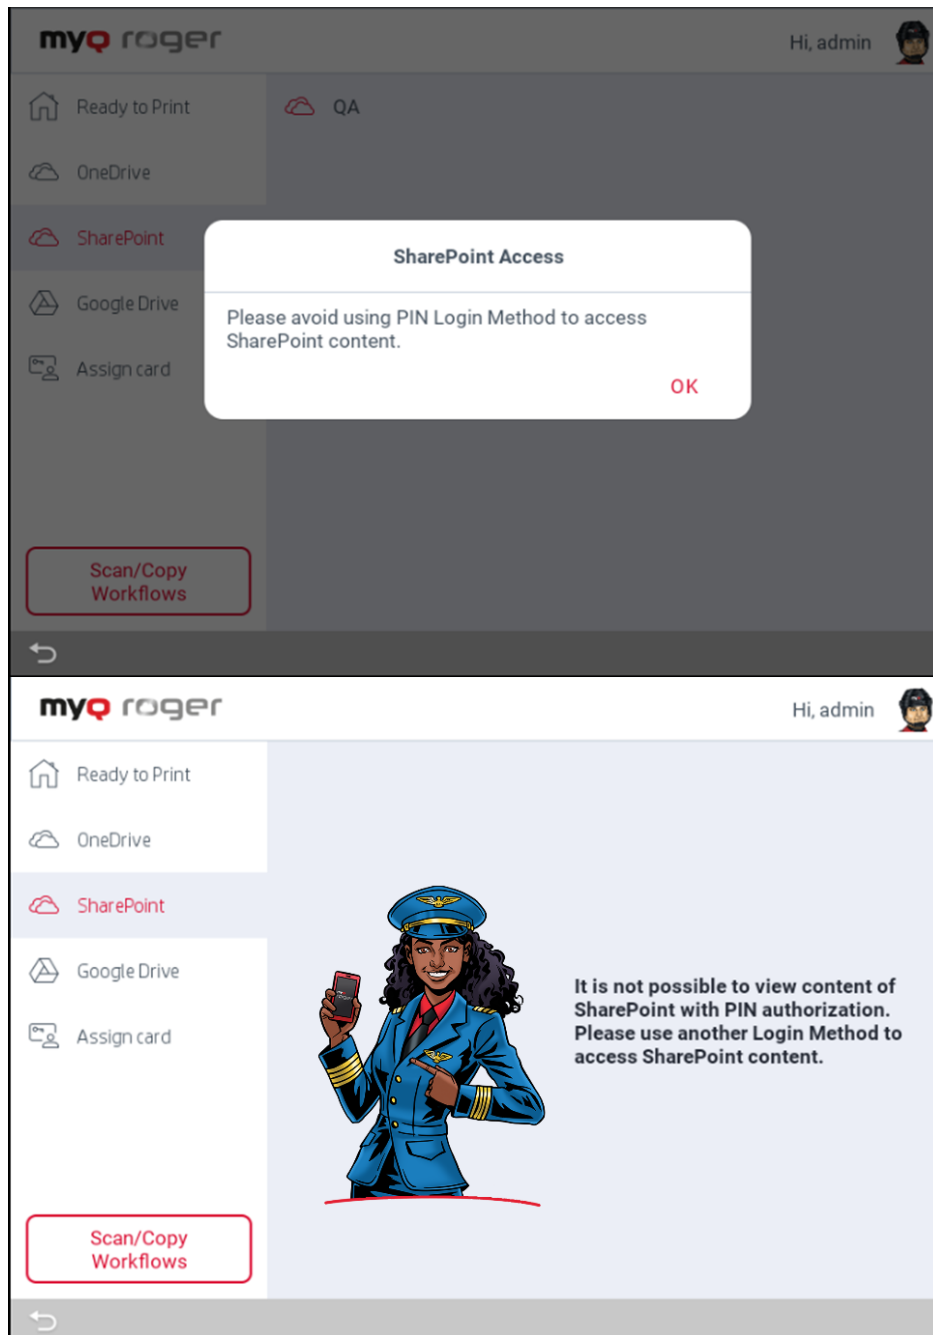



- There is also the **Scan here** feature, which scans your documents and saves the scans to **SharePoint**. If the control is on the mobile app, select the job (listed in the SharePoint tab) and tap **Print** or **Print All**. It is possible to print files in PDF, MS Office and Google Docs formats only on HP from Sharepoint storage.

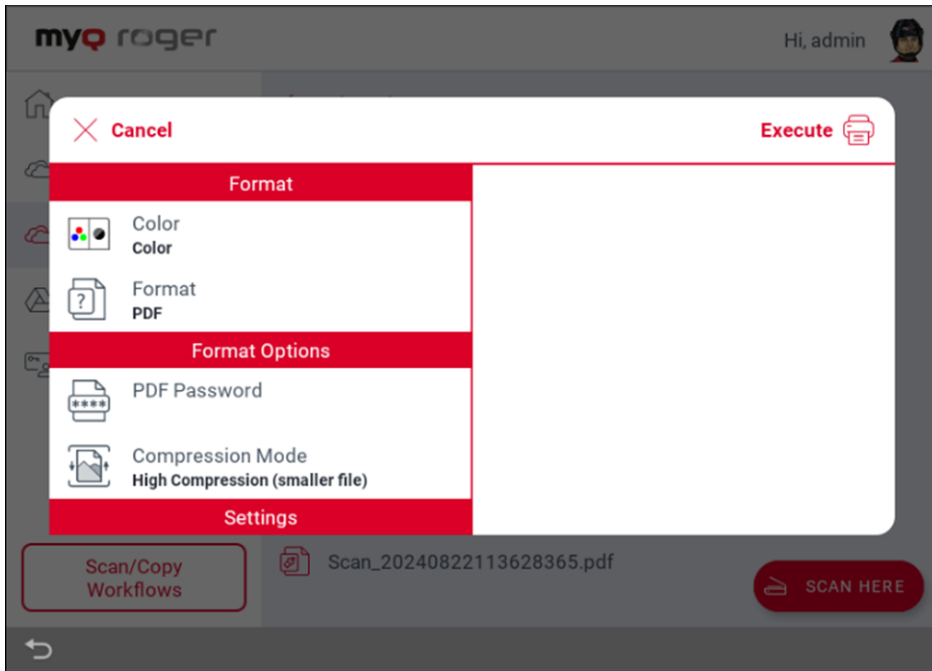


- **Universal Print** - This action is displayed only if a Universal Print printer is connected. This action shows all the jobs that can be printed from Universal Print.

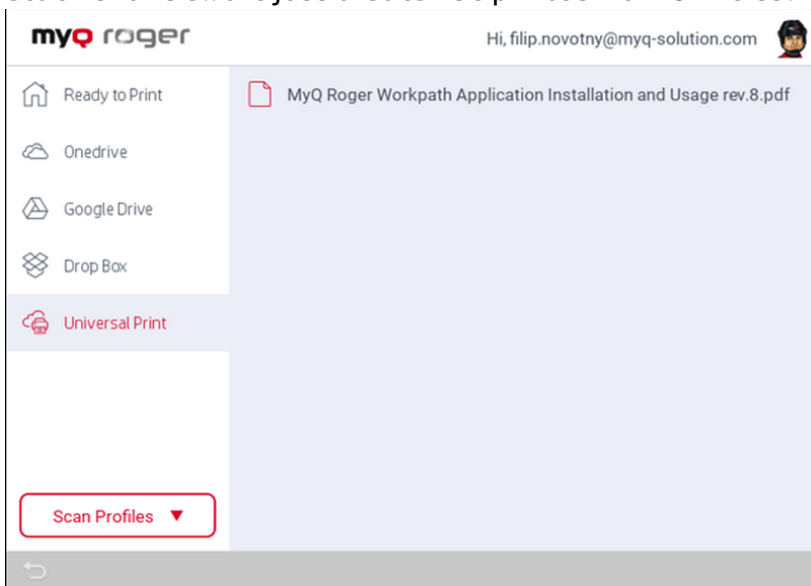

Swipe operations are also available in Universal Print for Printing and Displaying of the job options. Swipe operations for deleting jobs are not available. Job options are also displayed after clicking a job.

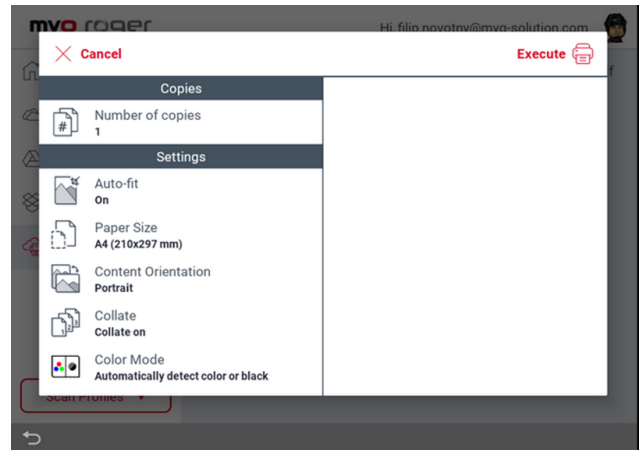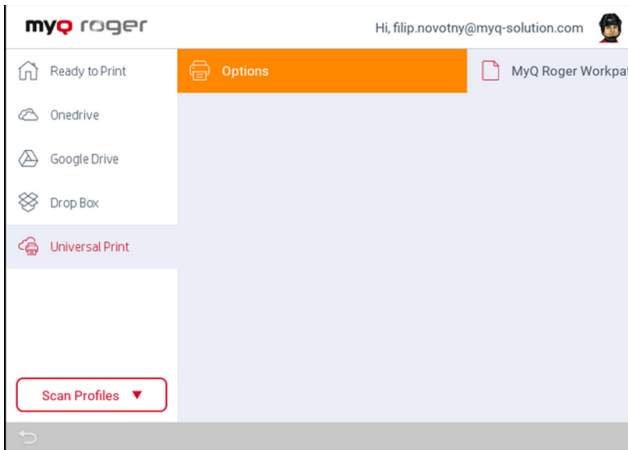

- **Print from USB** (if supported by the device) - Print from a USB drive connected to the MFD.

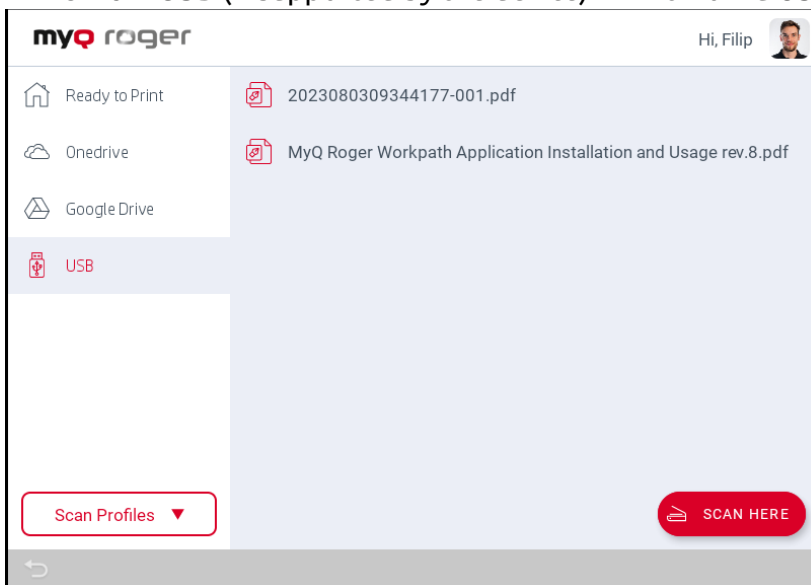


- **Assign card** - After tapping this action, the ID Card registration screen opens and the logged user can register their card by swiping it at the card reader.


7.1.3 User Workflows

At the bottom of the screen, there are the **Recent** and **Favorite** actions. The recent actions are the last actions performed on MyQ Roger, and the favorite actions can be edited on the MyQ Roger mobile app or by pressing the action on the device panel.


- **Easy Copy** - Tap to copy a job or press to display the parameters.

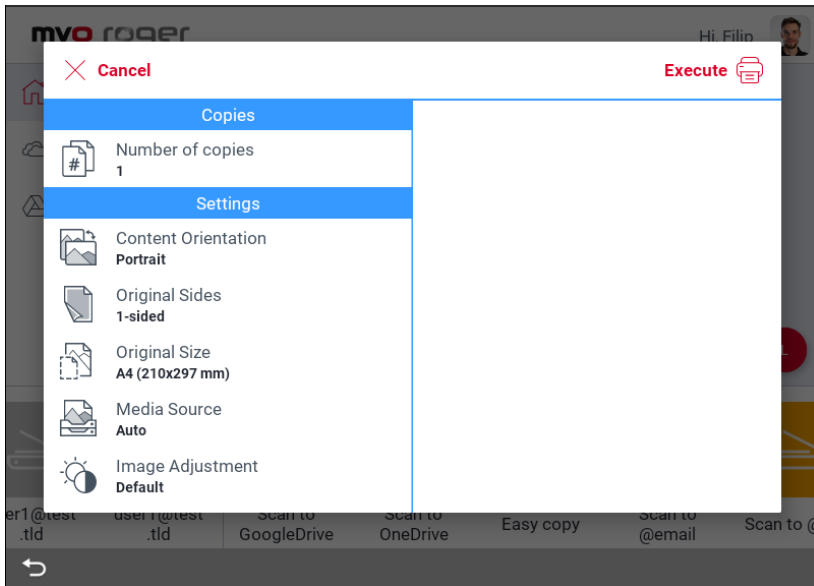


- **Scan to OneDrive** - Tap to scan a job and store it in your OneDrive or press to display the parameters.

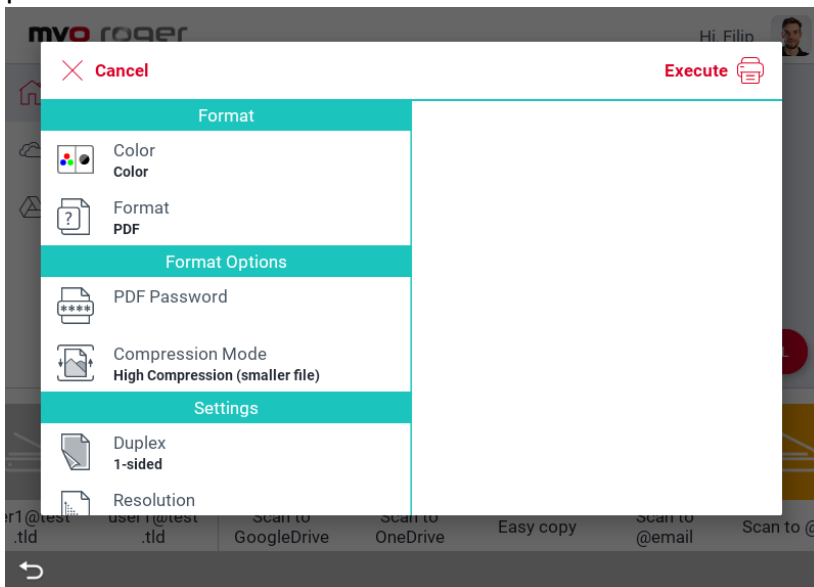


- **Scan to Google Drive** - Tap to scan a job and store it in your Google Drive or press to display the parameters.

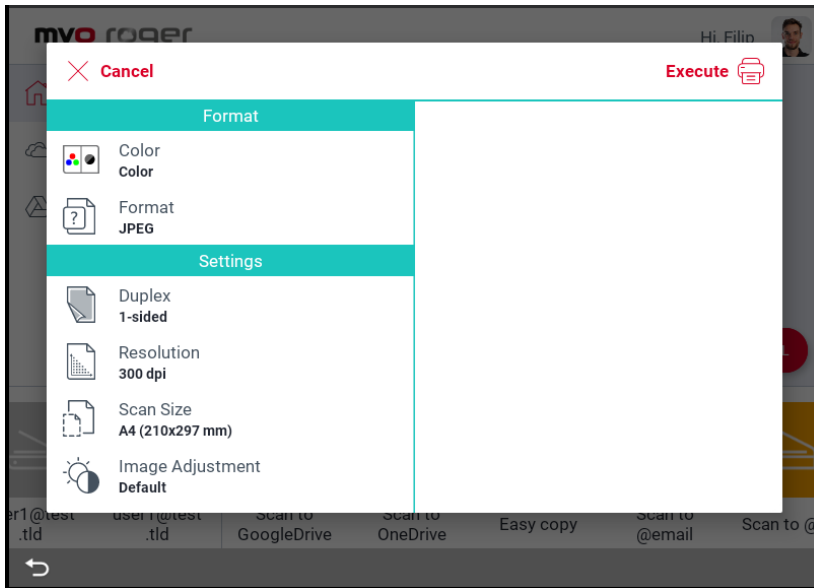

- **Scan to @me** - Tap to scan a job and send it to your email address or press to display the parameters.

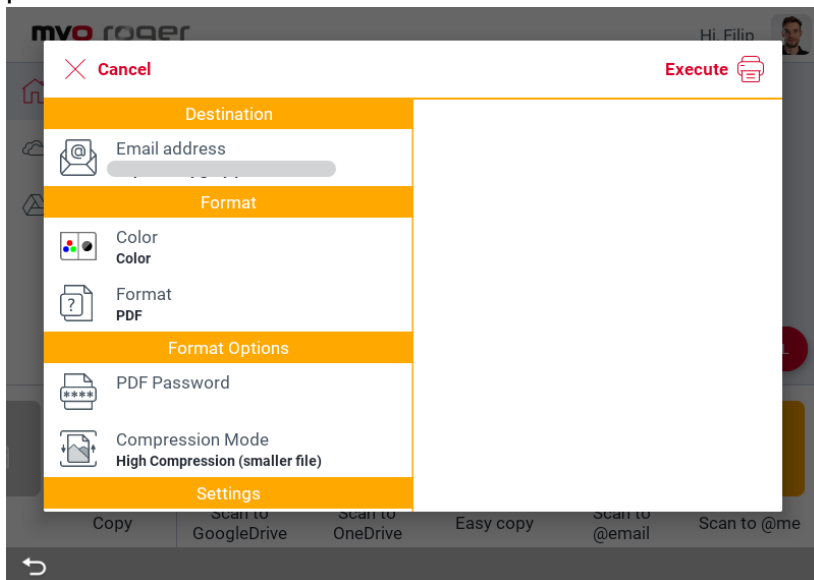


- **Scan to @email** - Tap to scan a job and send it to an email address or press to display the parameters.

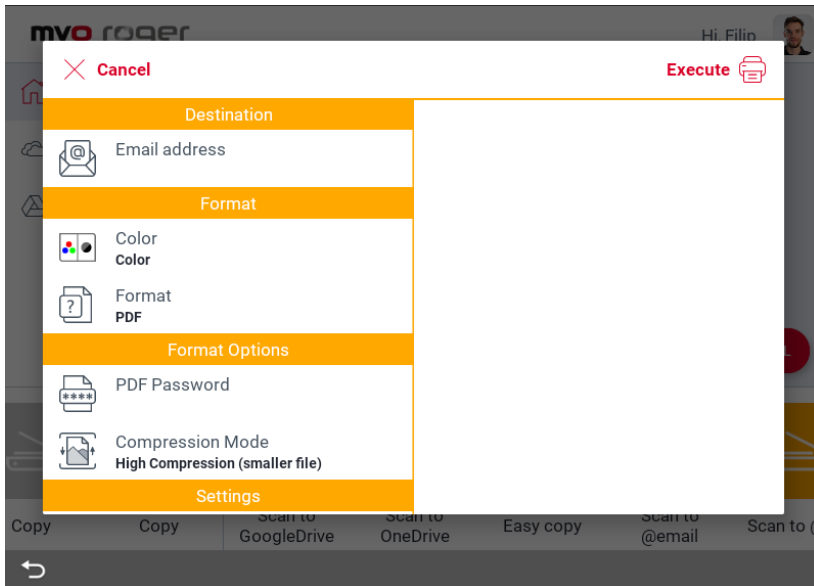

7.1.4 Supported Paper Formats

Check the table below to see which paper formats can be printed from multiple sources. It is recommended to use MyQ Roger Client, as most formats are supported there.

	Mobile App - OneDrive	Device Spool	MRC
A3 Portrait	✓		✓
A3 Landscape			✓
A4 Portrait	✓		✓
A4 Landscape			✓
A5 Portrait	✓		✓
A5 Landscape			✓
A4->A3	✓		✓
A4->A5	✓		✓
A3->A4	✓		✓
A5->A4	✓		✓
A3->A5	✓		✓
A5->A3	✓		✓

 The following file types are supported when printing from the mobile app from OneDrive and Google Drive:

- PNG (the file is converted to PDF and printed)
- MS Office (docx, xlsx, pptx)
- Google Docs (Doc, Table, Presentation)

8 Obtain Logs

When you contact MyQ Support to investigate any issues with MyQ Roger, you should specify:

- Your MyQ Roger **Tenant name**. The Tenant's name can be found:
 - In the MyQ Roger mobile app, go to More - Profile - Tenant name.
 - In MyQ Roger Client (MRC), it's visible in the top center.
 - In the terminal, tap the MyQ Roger logo on the login screen.
- The **username** (email) where the issue occurred.
- The exact **time** of the issue.
- A detailed **description** of the issue.
- **Logs** of any MyQ Roger products you currently use.

8.1 MyQ Roger HP Terminal Logs

To obtain logs from an HP device, go to the device's Web UI, in **Troubleshooting - Diagnostic Data**.

The screenshot shows the HP device Web UI interface. At the top, there is a navigation bar with tabs: Information, General, Copy/Print, Scan/Digital Send, Fax, Supplies, and Troubleshooting (which is highlighted in blue). Below the navigation bar, there is a sidebar menu with options: General Troubleshooting, Online Help, Diagnostic Data (highlighted in blue), Reset Factory Settings, Firmware Upgrade, and Scheduled Restart. The main content area is titled 'Diagnostic Data' and contains a section for 'Retrieve Diagnostic Data'. This section includes a warning icon and text: 'Export device information to a file that can be useful for detailed problem analysis. Select the file below and click Export. Note: This action will export product event logs and software version numbers to a local file. The exported data will be used to improve future versions of the product software.' There are three radio button options: 'Create zipped debug information file' (selected), 'Generate Debug Data' (checked checkbox), 'Clean up debug information' (unchecked checkbox), and 'Create device data file' (unselected). An 'Export' button is located at the bottom of this section. Below the button, it says 'This process could take several minutes.'

Select **Create zipped debug information file** and **Generate Debug Data** and click **Export**.

The process may take several minutes and when it's finished, you can select where to save the exported file.

Once this is done, select **Create device data file** and click **Export**. Then select where to save the exported file.


Another way to obtain logs from an HP device is to download them from the HP Command Center. Check [HP's guide](#) for instructions. If you don't have access to the HP Command Center, contact your HP partner.

Whichever way you obtain them, attach the exported logs files to your helpdesk case.


8.1.1 Logs from server web UI

Another option is to download logs directly from the server web UI.

Log into Roger web UI with rights for managing printers, open **Printers**, select the device, press **Actions**, and **Request Log Download**.

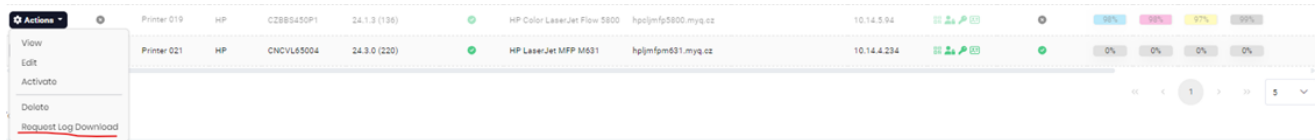

After a few seconds, there is the option to **Download Log** in **Actions**.

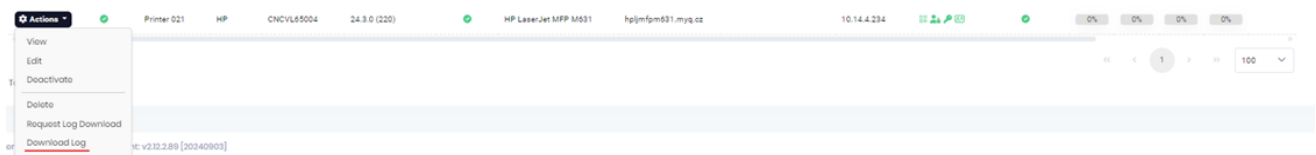

8.1.2 MyQ Roger Client logs

The default location of the MyQ Roger Client logs is in the following two directories:


1. C:\ProgramData\MyQ\Desktop Client\logs
2. %userprofile%\AppData\Local\MyQ\Desktop Client\logs

Store all the files and folders from both directories in a .zip file, and attach it to your helpdesk case.

9 Uninstallation

To uninstall the MyQ Roger embedded application from an HP MFD:

- Log in to <http://hpcommandcenter.com/> and go to the **Solutions** tab.
- On the left column, under **Solutions**, select MyQ Roger, and click **Manage**.
- In the pop-up window, click **Uninstall**.

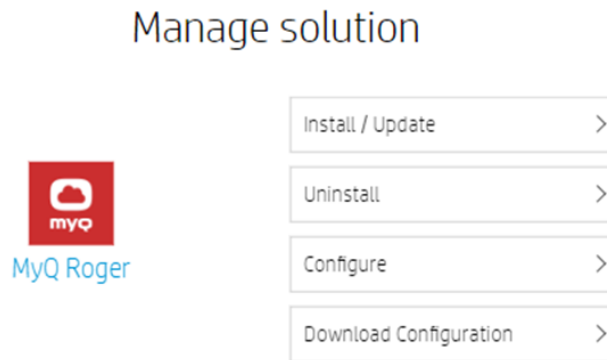

- Select the devices where you want to uninstall MyQ Roger and click **Next**.

< Uninstall

MyQ Roger Select target devices Uninstall

Select target devices
Select devices from which you want to uninstall this solution.

Filter All Search

<input type="checkbox"/>	Model name	Group	Serial number	Asset number	Status
<input type="checkbox"/>	HP COLOR LASERJET FLO...	Not grouped	CNC1L1X00L	-	⚠
<input type="checkbox"/>	HP COLOR LASERJET MF...	Not grouped	JP88Q5J0P7	sunshine	⚠
<input type="checkbox"/>	HP COLOR LASERJET MF...	Not grouped	JP88Q3W0HN	Darkside1	⚠
<input type="checkbox"/>	HP COLOR LASERJET MF...	Not grouped	CN58JDV02X	DXB	⚠
<input type="checkbox"/>	HP COLOR LASERJET MF...	Not grouped	CNC1L4300S	123456789	⚠
<input type="checkbox"/>	HP LASERJET MFP M528	Not grouped	NLCVNDW0HB	MyQPS	⚠
<input checked="" type="checkbox"/>	HP LASERJET MFP M528	Not grouped	NLCVN381CY	HPLJM528hq	Installed
<input type="checkbox"/>	HP PAGEWIDE COLOR FL...	Not grouped	CN7596K0N2	Herve	⚠

Selected devices: 0 / 8

Previous Next

- Select whether you want to uninstall the application now (recommended), or schedule it for later (up to 72 hours), and click **Uninstall**.

< Uninstall

MyQ Roger Select target devices Uninstall

Uninstall
Tip: If you choose not to uninstall this solution now, you can uninstall it up to 72 hours later.

Uninstall now
 Schedule uninstallation

Previous Uninstall


- A new task is created and the application is being uninstalled in the background. Click **Done**.

10 Availability Monitoring

You can view the real-time status of MyQ Roger components in [MyQ Roger Status](#).

You can check live and historical data related to the MyQ Roger system's performance, see if there is a planned or unplanned outage or scheduled maintenance.

All Systems Operational

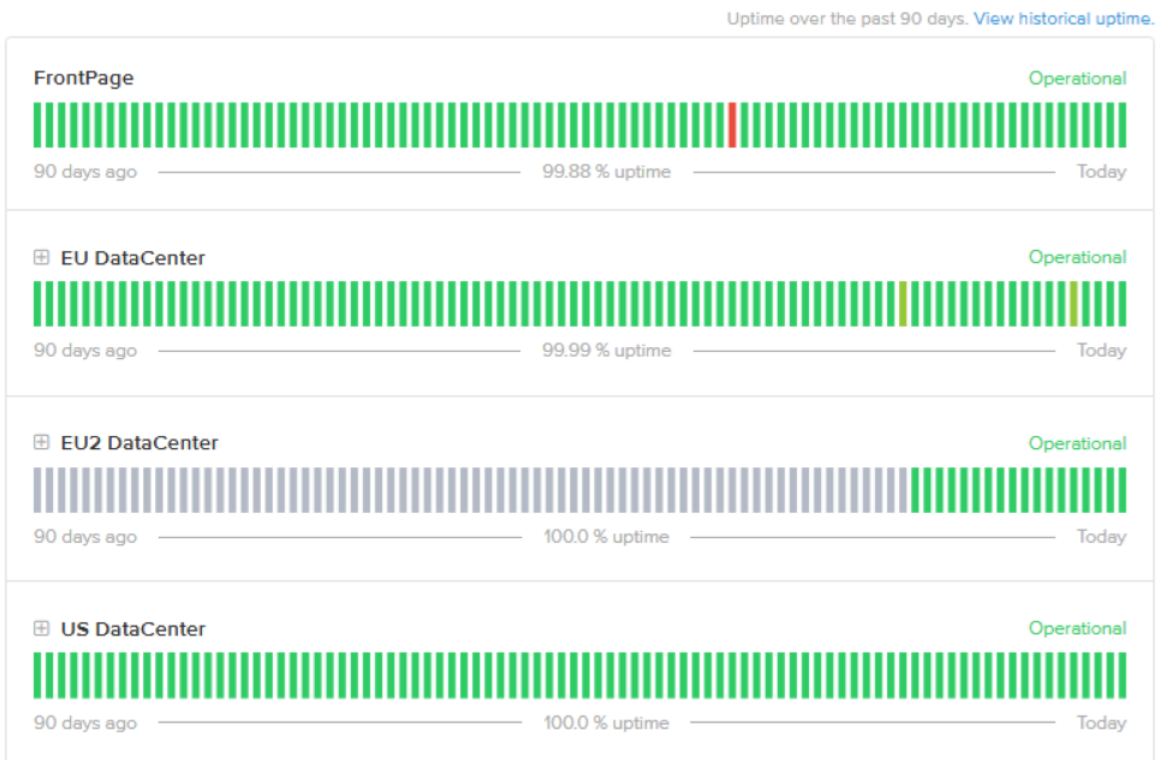


10.1 Current Status

There is information about the uptime of each datacenter (EU, EU2, US) and its components in the last 90 days.

You can select your corresponding datacenter and click the plus (+) sign next to its name to expand it and view each component.

If there was downtime, it will be marked in a color other than green (which means that all services are operational). You can click on the different color and see information about the outage.

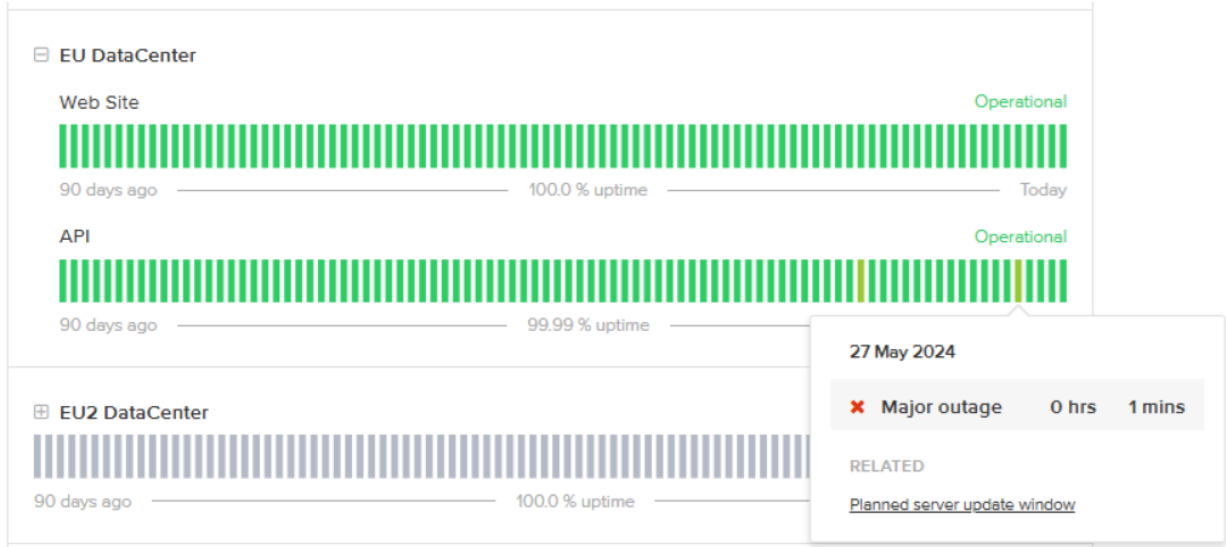

If it was planned, there will be information about the start, progress, and end of the outage.

Planned server update window

Scheduled Maintenance Report for MyQ Roger

- Completed** The scheduled maintenance has been completed.
Posted 4 days ago. May 27, 2024 - 18:00 UTC
- In progress** Scheduled maintenance is currently in progress. We will provide updates as necessary.
Posted 4 days ago. May 27, 2024 - 15:00 UTC
- Scheduled** We will be deploying server updates during this time.
Monday 27th May 17:00 CEST - 20:00 CEST (15:00 UTC - 18:00 UTC)
 We do not expect any downtime or interruption to the service.
Posted 4 days ago. May 27, 2024 - 13:59 UTC

This scheduled maintenance affected: EU DataCenter (Web Site, API) and US DataCenter (Web Site, API).

[← Current Status](#)


Powered by Atlassian Statuspage

You can also check the uptime’s history by clicking **View historical uptime** at the top of the table. Choose the datacenter or datacenter’s component from the drop-down to the left and set the three-month period you want to view on the right.

If there was downtime, it will be marked in a color other than green (which means that all services are operational). You can click on the different color and see information about the outage.



SUBSCRIBE TO UPDATES

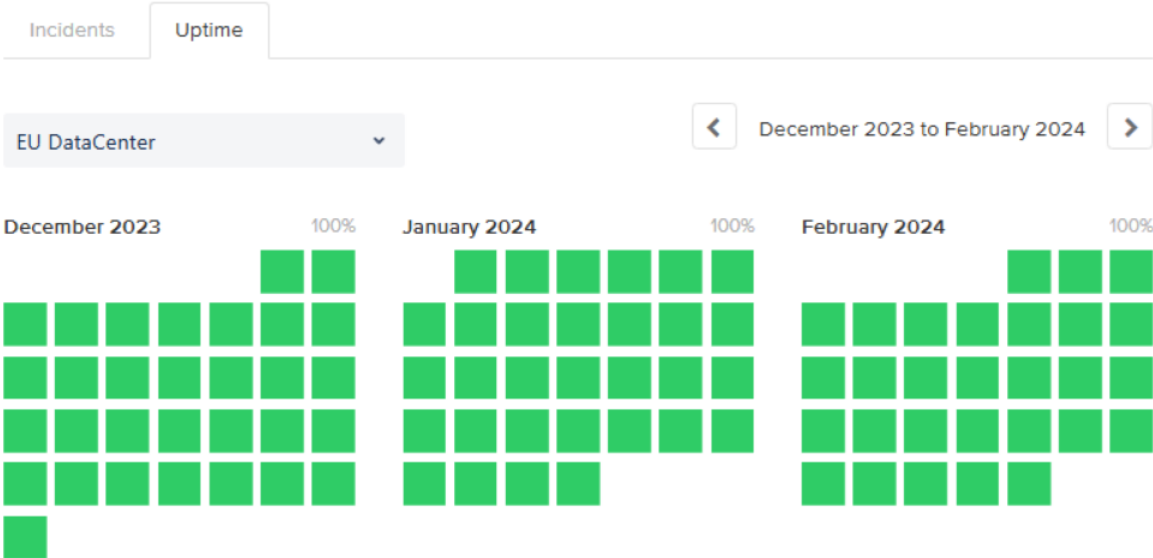

10.2 Past Incidents

Below the real-time status tables, there is a daily feed of past incidents. If the date you are looking for is not listed, you can click **Incident History** at the end of the page. You can now see an overview of past incidents for the last three months. You can change the three-month period on the top-right.

Incidents Uptime

March 2024 to May 2024

May 2024

[Scheduled] Planned server update window
The scheduled maintenance has been completed.
May 27, 15:00 - 18:00 UTC

[Scheduled] Planned re-configuration
The scheduled maintenance has been completed.
May 17, 18:00 - 20:00 UTC

April 2024

No incidents reported for this month.

March 2024

No incidents reported for this month.

10.3 Subscribe to Updates

Click **Subscribe to Updates** to receive a notification any time there is an update. You can get updates via email, Slack, and Atom Feed or RSS Feed.



All Systems Operational

SUBSCRIBE TO UPDATES

✉️ ⚙️ 📡 ✕

Get email notifications whenever MyQ Roger **creates, updates** or **resolves** an incident.
Email address:

SUBSCRIBE VIA EMAIL

This site is protected by reCAPTCHA and the Google [Privacy Policy](#) and [Terms of Service](#) apply.

Uptime over the past 90 days. [View historical uptime.](#)

11 Business Contacts

MyQ® Manufacturer	<p>MyQ® spol. s r.o. Harfa Office Park, Ceskomoravska 2420/15, 190 93 Prague 9, Czech Republic MyQ® Company is registered in the Companies register at the Municipal Court in Prague, division C, no. 29842</p>
Business information	<p>www.myq-solution.com info@myq-solution.com</p>
Technical support	<p>support@myq-solution.com</p>
Notice	<p>MANUFACTURER WILL NOT BE LIABLE FOR ANY LOSS OR DAMAGE CAUSED BY INSTALLATION OR OPERATION OF THE SOFTWARE AND HARDWARE PARTS OF THE MyQ® PRINTING SOLUTION.</p> <p>This manual, its content, design and structure are protected by copyright. Copying or other reproduction of all or part of this guide, or any copyrightable subject matter without the prior written consent of MyQ® Company is prohibited and can be punishable.</p> <p>MyQ® is not responsible for the content of this manual, particularly regarding its integrity, currency and commercial occupancy. All the material published here is exclusively of informative character.</p> <p>This manual is subject to change without notification. MyQ® Company is not obliged to make these changes periodically nor announce them, and is not responsible for currently published information to be compatible with the latest version of the MyQ® printing solution.</p>
Trademarks	<p>MyQ®, including its logos, is a registered trademark of MyQ® company. Microsoft Windows, Windows NT and Windows Server are registered trademarks of Microsoft Corporation. All other brands and product names might be registered trademarks or trademarks of their respective companies.</p> <p>Any use of trademarks of MyQ® including its logos without the prior written consent of MyQ® Company is prohibited. The trademark and product name is protected by MyQ® Company and/or its local affiliates.</p>